

# 1. Tutorial on Optical Sources and Detectors

April 24<sup>th</sup> 2012

## Problem 1: Direct and indirect semiconductors

Figure 1 shows the absorption coefficients of a direct and an indirect semiconductor as a function of wavelength.

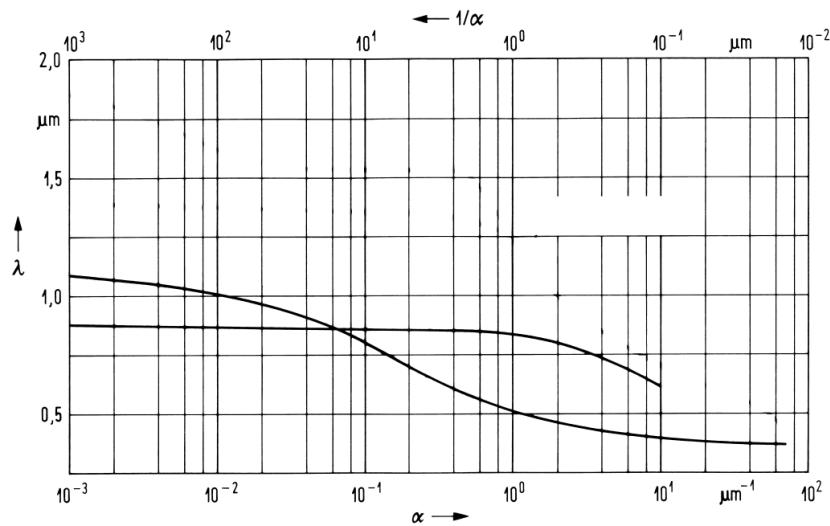


Figure 1: Absorption coefficient of a direct and an indirect semiconductor

- Which curve belongs to the direct and which one belongs to the indirect semiconductor? Explain your answer.
- What is the band gap energy of both semiconductor materials? Which material could it be?

Figure 2 shows the schematic band diagram of an indirect semiconductor. Holes in the valence band tend towards the energy maximum of the valence band whereas electrons in the conduction band tend towards the conduction band minimum. For the following calculations use the values of silicon: Indirect band-gap energy  $W_G = 1.13\text{eV}$  and lattice constant  $a = 0.543\text{nm}$ .

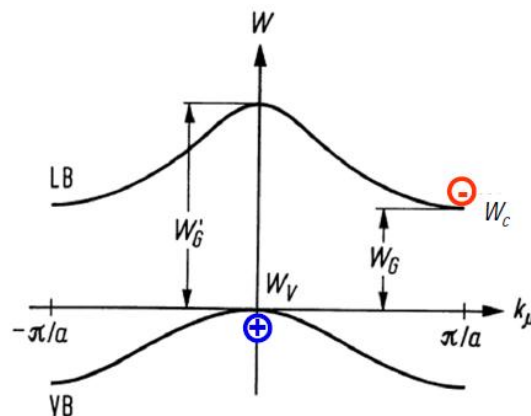


Figure 2: Schematic band diagram of an indirect semiconductor; LB (“Leitungsband”) denotes the conduction band; VB is the valence band.

- c) Calculate the frequency of a photon that corresponds to the band gap energy of silicon. How large is the momentum of this photon? Compare this momentum to the crystal momentum of the electron.
- d) Consider now a phonon with a momentum that corresponds to the crystal momentum of the electron. Compare the energy of the phonon to the band gap energy when you consider a value of  $v_s = 8433\text{m/s}$  for the speed of sound in silicon.
- e) Is it possible to build an efficient light source using silicon? Explain your answer.

**Problem 2: Linear and logarithmic scale conversion**

The logarithmic scale is widely used in optical communication. Especially the ratio between two power levels is often described in the dimensionless unit decibel (dB). Such a ratio between power  $P_1$  and power  $P_0$  is normally defined in dB as  $10 \cdot \log_{10}(P_1/P_0)$ .

- a) Calculate the corresponding numbers in dB for the different power ratios of  $P_1/P_0 = 1, 2, 4, 10, 20, 100, 0.5, 0.25, 0.1$
- b) In contrast to dB, the absolute unit dBm is used to express an absolute power. The unit dBm refers to the power  $P_1$  referenced to 1mW and is therefore defined as  $P_{[\text{dBm}]} = 10 \cdot \log_{10}(P_1/1\text{mW})$ . Fill the following table, use the results from a) and try to do it without a calculator.

linear	logarithmic
100 nW	
8 mW	
25 $\mu\text{W}$	
10 mW	
	3 dBm
	26 dBm
	-7 dBm
	-23 dBm

**Bonus Program:**

At three randomly chosen exercises we will collect your notes before the exercise starts. They will be marked and if you accomplish an average of 70% or more of all collected exercises, your oral examination grade will be upgraded by 0.3 or 0.4 (except grades of 1.0 and 4.7 or worse). If you cannot join an exercise, you may also hand your notes to the teaching assistants (see contact details below) before the respective exercise.

**Questions and Comments:**

Matthias Lauermann  
 Building: 30.10, Room: 2.32  
 Phone: 0721/608-41695  
 Email: Matthias.Lauermann@kit.edu

Jörg Pfeifle  
 Building: 30.10, Room: 2.23  
 Phone: 0721/608-48954  
 Email: Joerg.Pfeifle@kit.edu