

# An Easy Introduction to Plasmonics

**Wolfgang Freude**

Institute of Photonics and Quantum Electronics (IPQ), University of Karlsruhe, Germany



Universität Karlsruhe (TH)

Institut für Photonik und Quantenelektronik (IPQ)

<http://www.ipq.uni-karlsruhe.de>

---

Photonics BW e. V.

Arbeitskreis „Optische Kommunikation“ 03. April 2009, Stuttgart



# The Beginning of All

- Maxwell's equations
- Transverse waves
- Longitudinal waves



# Maxwell's Equations

$$\begin{aligned}\operatorname{curl} \vec{H} &= \frac{\partial \vec{D}}{\partial t}, & \operatorname{curl} \vec{E} &= -\frac{\partial \vec{B}}{\partial t}, \\ \operatorname{div} \vec{D} &= 0, \quad \vec{D} = \epsilon_0 \vec{E} + \vec{P} & \operatorname{div} \vec{B} &= 0, \quad \vec{B} = \mu_0 \vec{H}\end{aligned}$$

Decoupled form:

$$\left( \operatorname{curl} \left( \frac{1}{\epsilon_r} \operatorname{curl} \right) \right) \vec{H} = \left( -\frac{1}{c^2} \frac{\partial^2}{\partial t^2} \right) \vec{H}, \quad \left( \frac{1}{\epsilon_r} \operatorname{curl} \operatorname{curl} \right) \vec{E} = \left( -\frac{1}{c^2} \frac{\partial^2}{\partial t^2} \right) \vec{E}$$

Constitutive equations (in a homogenous dielectric medium, no space charges):

$$\operatorname{div} \vec{B} = 0, \quad \operatorname{div} (\epsilon_0 \epsilon_r \vec{E}) = \epsilon_0 \epsilon_r \operatorname{div} \vec{E} + \cancel{\operatorname{grad} (\epsilon_0 \epsilon_r)} \cdot \vec{E} = 0$$

Homog. medium and vector identity  $\nabla^2 \vec{E} = \operatorname{grad} \operatorname{div} \vec{E} - \operatorname{curl} \operatorname{curl} \vec{E}$ :

$$\operatorname{grad} \operatorname{div} \vec{E} - \nabla^2 \vec{E} = \left( -\frac{\epsilon_r}{c^2} \frac{\partial^2}{\partial t^2} \right) \vec{E}$$



# Formal Wave Solutions without External Excitation

Wave equation in time domain, homogeneous medium:

$$\text{grad div } \vec{E} - \nabla^2 \vec{E} = \left( -\frac{\epsilon_r}{c^2} \frac{\partial^2}{\partial t^2} \right) \vec{E}$$

Plane wave ansatz (plane phase surfaces  $\vec{k} \cdot \vec{r} = \text{const}$ ,  $\vec{k} \cdot \vec{k} = k^2$ ):

$$\vec{E}(t, \vec{r}) = \vec{E}(f, \vec{\kappa}) e^{j(\omega t - \vec{k} \cdot \vec{r})}, \quad \omega = 2\pi f, \quad \vec{k} = 2\pi \vec{\kappa} = k_x \vec{e}_x + k_y \vec{e}_y + k_z \vec{e}_z$$

Operator correspondences ( $q = x, y, z$ ):

$$\partial_t = j\omega, \quad \partial_q = -j k_q, \quad \text{grad} = -j \vec{k}, \quad \text{div} = -j \vec{k} \cdot, \quad \nabla^2 = -k^2$$

Wave equation in Fourier domain (Helmholtz equation):

$$-j \vec{k} \cdot (-j \vec{k} \cdot \vec{E}) + k^2 \vec{E} = \epsilon_r \frac{\omega^2}{c^2} \vec{E}$$

Transverse waves  $\vec{k} \perp \vec{E}$ ,  $\vec{k} \cdot \vec{E} = 0$ , dispersion relation:

$$k^2 = \epsilon_r(f, \vec{\kappa}) \frac{\omega^2}{c^2}, \quad k_0 = \frac{\omega}{c} \quad (\text{dispersion in vacuum})$$

Longitudinal waves  $\vec{k} \parallel \vec{E}$ ,  $\vec{k} \cdot (\vec{k} \cdot \vec{E}) = k^2 \vec{E}$ , dispersion relation:

$$\epsilon_r(f, \vec{\kappa}) = 0 \quad \text{for all } \vec{\kappa} \parallel \vec{E}$$



## Longitudinal (Compressional) Waves

Even for charge fluctuations in a plasma, the overall system remains electrostatically neutral. Field arises solely from displacement of charges having opposite sign, but occurring in equal numbers.

There is no overall free charge  $\Rightarrow \rho = 0$ :

$$\operatorname{div} \vec{D} = \epsilon_0 \epsilon_r \operatorname{div} \vec{E} = 0$$

Polarisation  $\vec{P}$  exists, because free carriers may be moved leading to re-radiation (without changing overall charge neutrality!). Therefore also the electric field  $\vec{E} \parallel \vec{P}$  exists:

$$\operatorname{div} \vec{E} \neq 0 \quad \Rightarrow \quad \epsilon_r = 0$$

$\epsilon_r(\omega_p) = 0$  becomes the condition for plasma oscillations at the plasma angular eigen frequency  $\omega = \omega_p$ , i. e., for natural oscillation of a neutral plasma.

Excitation of plasma oscillations only with particles (e. g., electrons traversing a metal foil can lose energy in quanta  $\hbar\omega_p$ ), no coupling to electromagnetic field, no propagation  $e^{j(\omega t - \sqrt{\epsilon_r} k_0 z)}$  with  $\epsilon_r = 0$ .



# Why Does a Local Charge Perturbation Not Propagate?

Poisson equation  $\epsilon \operatorname{div} \vec{E} = \rho$ ,  $\vec{E} = -\operatorname{grad} \varphi$ ,  $\nabla^2 \varphi = -\rho/\epsilon$  for an electron concentration perturbation  $N_s - N$  wrt the unperturbed concentration  $N$ , assuming Boltzmann statistics  $N_s = N e^{\varphi/U_T}$ , resulting in a small potential perturbation  $\varphi/U_T \ll 1$ ,  $U_T = \frac{kT}{e}$ :

$$\frac{d^2 \varphi}{dx^2} = -e \frac{N_s - N}{\epsilon} \approx -\frac{eN}{\epsilon} \left( e^{\varphi(x)/U_T} - 1 \right) \approx \frac{eN}{\epsilon U_T} \varphi$$

Solution has structure  $e^{\pm x/L_D}$ . Proper choice of sign for  $x \geq 0$ :

$$\varphi(x) = \varphi_0 e^{-x/L_D}, \quad L_D = \sqrt{\frac{\epsilon U_T}{eN}}$$

Debye length: Screening length of charge perturbation.

Perturbations of the potential compensated by re-arrangement of carriers inside the Debye length  $L_D$ : If potential would have changed inside  $L_D$  by  $\Delta\varphi \sim U_T$ , then carrier density re-arranges:

$$N \rightarrow N_s = 2.72 N \quad \text{for} \quad N \exp\left(\frac{0}{U_T}\right) \rightarrow N_s = N \exp\left(\frac{U_T}{U_T}\right)$$




# Outline

- **Plasma density oscillation**
  - Electron density perturbation
  - Plasma frequency and dispersion diagram
- **Modeling the dielectric constant**
  - Bound and free charge carriers
  - Free carriers and dielectric constant
- **Dielectric-dielectric interface**
  - Boundary conditions
  - Fresnel's formulae. Brewster's angle
- **Dielectric-metal interface**
  - Boundary conditions. Surface plasmon polariton (SPP)
  - Dispersion diagram. Characteristic lengths
  - SSP excitation. SNOM visualization. Applications
- **Summary**



# Plasma Density Oscillation for Local Concentration Perturbation

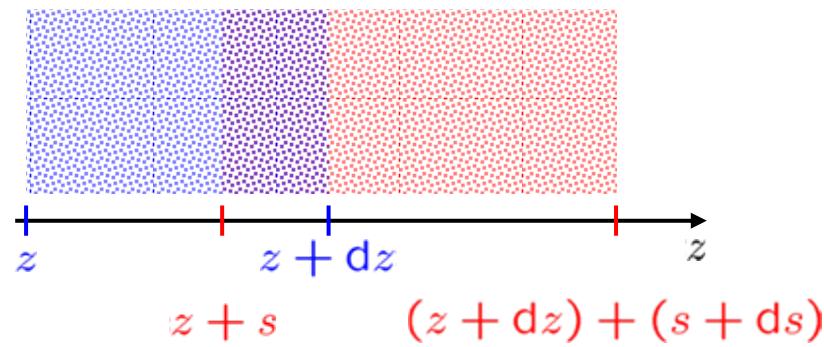

Electrons in  $z \dots z + \Delta z$  at time  $t$   
shifted by small amount  $s(t, z) \rightarrow$   
**region  $z + s \dots (z + dz) + (s + ds)$**   
Concentration  $N \rightarrow N_s$ ,  $ds \ll dz$ :  

$$N_s = N \frac{dz}{dz+ds} \approx N(1 - \frac{ds}{dz})$$

Background of positive ions with concentration  $N$  does not move.  
Average charge concentration and electric field  $\text{div } \vec{E} = \rho/\epsilon_0$ :


$$\rho = -eN_s + eN = eN \frac{ds}{dz}, \quad \frac{dE_z}{dz} = \frac{eN}{\epsilon_0} \frac{ds}{dz} \Rightarrow E_z = \frac{eN}{\epsilon_0} s$$

Other approach: **Cuboid of electrons** with cross-section  $A$  **shifted by  $s$**  ( $ds = 0$ )  $\rightarrow$  "capacitor"  $C = \frac{\epsilon_0 A}{dz}$  with "electrode" distance  $dz$  and charge  $Q = NeAs \rightarrow$  electric field amplitude  $E_z = \frac{Q}{C dz} = \frac{Ne}{\epsilon_0} s$   
Rest. force  $F_z = -eE_z = -\frac{Ne^2}{\epsilon_0} s = -Ks = -m_e \omega_p^2 s \cong m_e \times \text{accel.}$ :

$$-m_e \omega_p^2 s = m_e \frac{d^2 s}{dt^2}, \quad \omega_p^2 = \frac{K}{m_e} = \frac{Ne^2}{\epsilon_0 m_e} \Rightarrow s(t) = \hat{s} \cos(\omega_p t)$$



# Plasma Density Oscillation (Plasmon). Dispersion Diagram

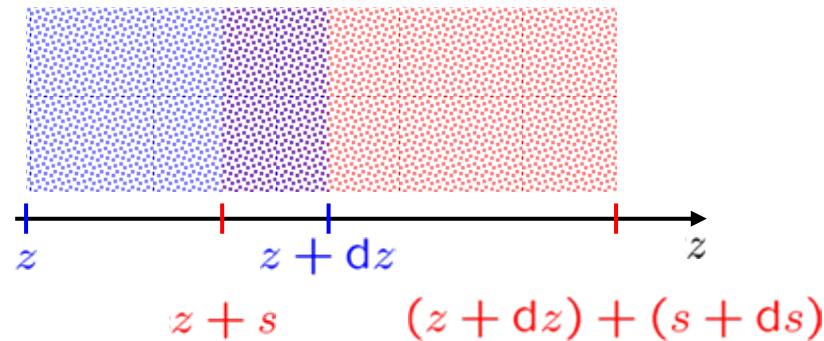


Local density perturbation → electrons oscillate with plasma frequency →  $s(t) = \hat{s} \cos(\omega_p t)$ :

$$\omega_p^2 = \frac{Ne^2}{\epsilon_0 m_e}$$

Any local perturbation of the electron density results in an undamped oscillation (plasma assumed to be collision-free, no losses). Adjacent perturbations do not influence each other, so electron density perturbations do not propagate.

Depending on the periodicity of a spatial perturbation (set from outside), any “wavelength” (“propagation constant”  $\beta = k_z$ ) may be chosen ⇒ dispersion diagram for  $E_z = \frac{Ne}{\epsilon_0} s$  is a horizontal line.

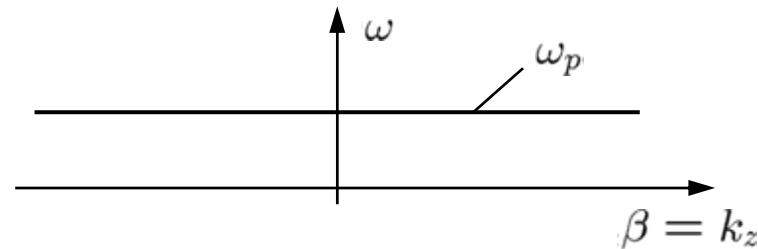

Arbitr. phase vel., gr. vel.  $\frac{d\omega}{d\beta} = 0$   
No excitation by transverse elmag waves, only by particle impact



# Outline

- Plasma density oscillation
  - Electron density perturbation
  - Plasma frequency and dispersion diagram
- Modeling the dielectric constant
  - Bound and free charge carriers
  - Free carriers and dielectric constant
- Dielectric-dielectric interface
  - Boundary conditions
  - Fresnel's formulae. Brewster's angle
- Dielectric-metal interface
  - Boundary conditions. Surface plasmon polariton (SPP)
  - Dispersion diagram. Characteristic lengths
  - SSP excitation. SNOM visualization. Applications
- Summary



# Medium Properties

$$\vec{P}(t, \vec{r}) = \epsilon_0 \int_0^\infty \chi(\tau, \vec{r}) \vec{E}(t - \tau, \vec{r}) d\tau,$$

$$\vec{P}(f) = \epsilon_0 \underline{\chi}(f) \vec{E}(f), \quad \underline{\chi}(f) = \int_0^\infty \chi(t) e^{-j2\pi ft} dt,$$

$$\underline{\chi}(f) = \chi(f) + j\chi_i(f) = \epsilon_r(f) - 1 - j\epsilon_{ri}(f), \quad \underline{\chi}(f) = \underline{\chi}^*(-f)$$

Refractive Index and Dielectric Constant  $\bar{\epsilon}_r = \bar{n}^2$

$$\bar{n} = n - j n_i,$$

$$\epsilon_r = n^2 - n_i^2,$$

$$n^2 = \frac{1}{2}\epsilon_r \left( 1 + \sqrt{1 + \epsilon_{ri}^2/\epsilon_r^2} \right),$$

$$n \approx \sqrt{\epsilon_r} \quad (\text{for } |\epsilon_{ri}| \ll \epsilon_r)$$

$$n \approx \sqrt{|\epsilon_{ri}|/2} \quad (\text{for } |\epsilon_{ri}| \gg \epsilon_r)$$

$$\bar{\epsilon}_r = \epsilon_r - j \epsilon_{ri},$$

$$\epsilon_{ri} = 2n n_i,$$


$$n_i = \epsilon_{ri}/(2n),$$

$$n_i \approx \epsilon_{ri}/(2\sqrt{\epsilon_r}),$$

$$n_i \approx \text{sgn}(\epsilon_{ri}) \sqrt{|\epsilon_{ri}|/2}$$



# Free and Bound Charge Carriers

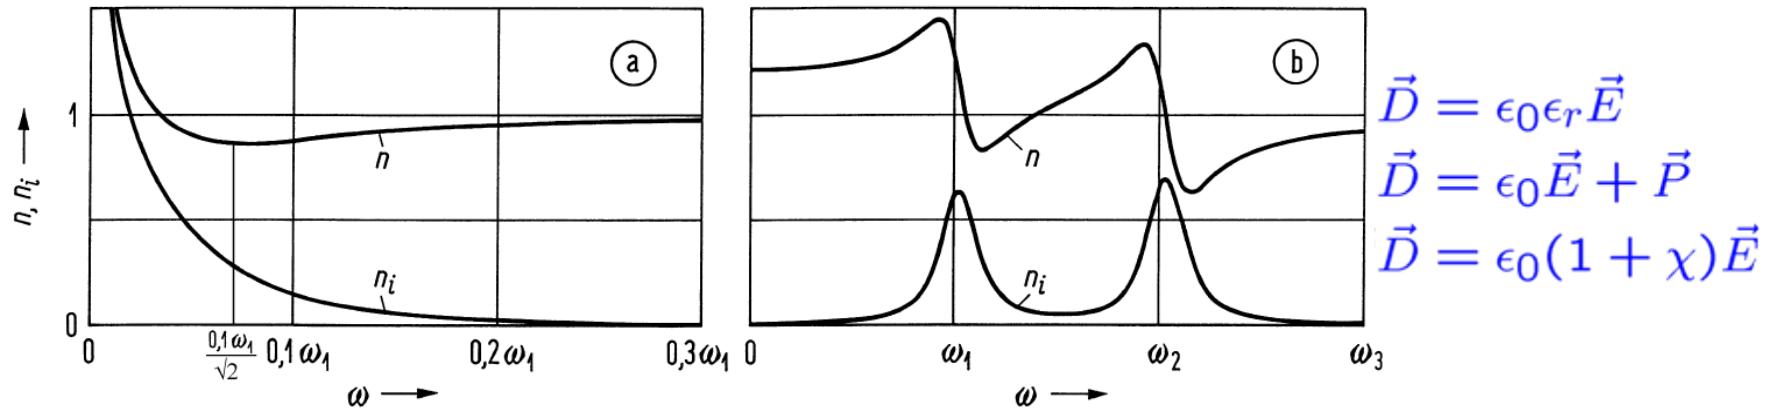

$$\vec{D} = \epsilon_0 \epsilon_r \vec{E}$$

$$\vec{D} = \epsilon_0 \vec{E} + \vec{P}$$

$$\vec{D} = \epsilon_0 (1 + \chi) \vec{E}$$

**Fig. 2.1.** Real part  $n$  und negative imaginary part ( $n_i$ ) of complex refractive index  $\bar{n} = n - j n_i$ : Frequency dependence (a) Free carriers only (b) Two collectives of bound charges with high mass (ions, low angular resonance frequency  $\omega_1$ ) and low mass (electrons, high angular resonance frequency  $\omega_2$ )

Transverse  $\vec{E}$ -field forces molecules and bound electrons to vibrate. Force  $\vec{F}$  exerted on charge  $q$  is  $\vec{F} = q\vec{E}$ . Assuming  $\vec{E} = E_x \vec{e}_x$ , no losses  $\rightarrow$  Newton's 2<sup>nd</sup> law: forces (driving + restoring force  $\sim \omega_r^2$ )  $\equiv m_r \times$  acceleration  $\rightarrow$  electric dipole moment  $\vec{P} = qN \vec{x}$ :

$$q\hat{E}_x \cos \omega t - m_r \omega_r^2 x = m_r \frac{d^2 x}{dt^2}, \quad \vec{x}(f) = \frac{q/m_r}{\omega_r^2 - \omega^2} \vec{E}(f) = \frac{\vec{P}(f)}{qN}$$

$$\bar{\epsilon}_r = \bar{n}^2 = 1 + \frac{N e^2}{\epsilon_0 m_r} \frac{1}{\omega_r^2 - \omega^2}$$



# Free Carriers and Dielectric Constant

Spatially fixed positive ions with concentration  $N$  providing  $f_e$  free electrons each, which produce dielectric constant  $\bar{\epsilon}_r = \epsilon_r - j\epsilon_{ri}$ .

Transverse  $\vec{E}$ -field makes free electrons vibrate in unison  $\rightarrow$  No density perturbation  $\rightarrow$  No restoring force  $\Rightarrow \omega_r = 0$ . Electron displacement  $\vec{x} \sim -q\vec{E}$  opposite to driving force  $\vec{F} = q\vec{E}$  (no loss:  $180^\circ$  phase at all frequencies  $\omega \neq 0$ ):

Bound:  $\epsilon_r = n^2 - n_i^2 = 1 + \frac{Ne^2}{\epsilon_0 m_r} \frac{1}{\omega_r^2 - \omega^2}, \quad \epsilon_{ri} = 2nn_i = 0$

Free:  $\epsilon_r = n^2 - n_i^2 = 1 - \frac{Nf_e e^2}{\epsilon_0 m_e} \frac{1}{\omega^2} = 1 - \frac{\omega_p^2}{\omega^2}, \quad \omega_p^2 = \frac{Nf_e e^2}{\epsilon_0 m_e}$

Free electrons oscillating out of phase with incident light, re-radiate wavelets tending to cancel incoming disturbance:  $\Rightarrow 0 < \epsilon_r < 1$


At  $\omega = \omega_p$ , no plasma resonance is excited, but re-radiated wavelets cancel incoming disturbance exactly:  $\Rightarrow \epsilon_r = 0$

For  $\omega \leq \omega_p$ , no propagation:  $\Rightarrow e^{j(\omega t - \sqrt{\epsilon_r} k_0 z)} = e^{-\sqrt{|\epsilon_r|} k_0 z} e^{j\omega t}$



# Free Carriers and Dielectric Constant: Yet Another Approach

[18] Fig. 14.19

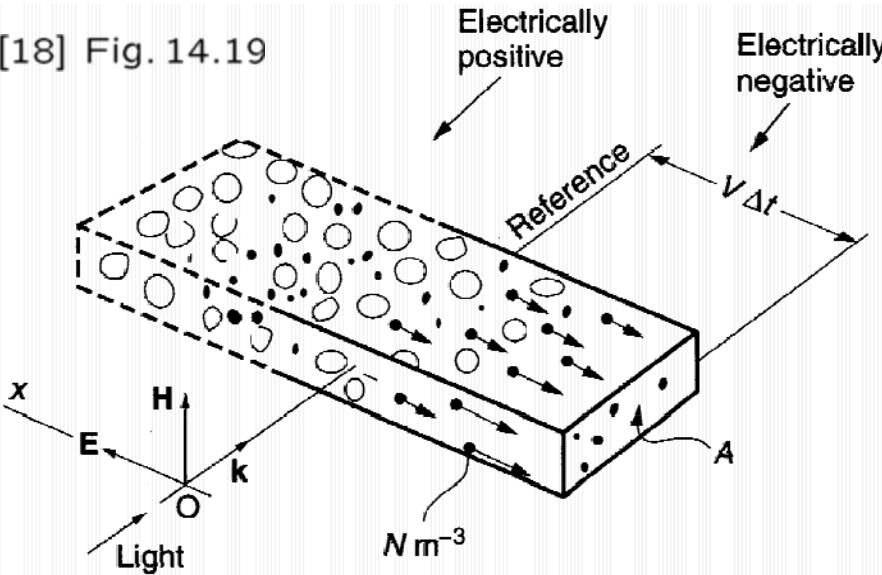

Plasma current density:

$$J_x = \frac{1}{A} \frac{dQ}{dt} \Rightarrow \hat{J}_x(f) = -j \frac{Ne^2}{m_e \omega} \hat{E}_x(f) \rightarrow \vec{J}(f) = -j \frac{Ne^2}{m_e \omega} \vec{E}(f)$$

Maxwell, this time with  $\text{curl } \vec{H} = \frac{d\vec{D}}{dt} + \vec{J}$  and  $\vec{D} = \epsilon_0 \vec{E}$ :

$$\text{curl } \vec{H}(f) = j \omega \epsilon_0 \vec{E}(f) + \vec{J}(f) = j \omega \epsilon_0 \left(1 - \frac{Ne^2}{\epsilon_0 m_e \omega^2}\right) \vec{E}(f)$$

Result:  $\bar{\epsilon}_r = \bar{n}^2 = 1 - \frac{\omega_p^2}{\omega^2}$ ,  $\omega_p^2 = \frac{Ne^2}{\epsilon_0 m_e}$ . Semicond.: Background- $\epsilon_r$ !

Transverse  $\vec{E}$ -field forces free electrons to vibrate. Now with velocity  $\vec{v}(t) = \hat{v}_x e^{j\omega t} \vec{e}_x$ :

$$-e \hat{E}_x e^{j\omega t} = -m_e \frac{d}{dt} (\hat{v}_x e^{j\omega t})$$

$$\hat{v}_x(f) = -j \frac{e}{m_e \omega} \hat{E}_x(f)$$

Total charge passing  $A$ :

$$dQ = e N A v_x dt$$




# Outline

- Plasma density oscillation
  - Electron density perturbation
  - Plasma frequency and dispersion diagram
- Modeling the dielectric constant
  - Bound and free charge carriers
  - Free carriers and dielectric constant
- Dielectric-dielectric interface
  - Boundary conditions
  - Fresnel's formulae. Brewster's angle
- Dielectric-metal interface
  - Boundary conditions. Surface plasmon polariton (SPP)
  - Dispersion diagram. Characteristic lengths
  - SSP excitation. SNOM visualization. Applications
- Summary



# Dielectric-Dielectric Interface — Boundary Conditions

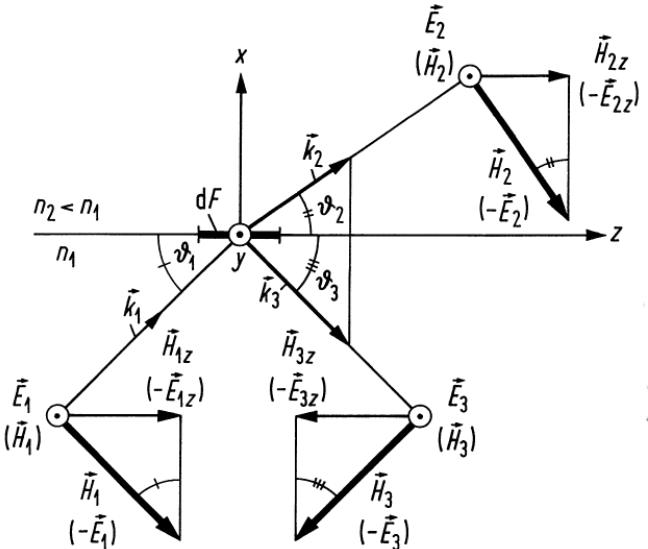

$$\vec{\Psi}(t, \vec{r}) = \vec{\Psi} \exp(j\omega t - j\vec{k}_s \cdot \vec{r}),$$

$$\vec{\Psi}_s = \vec{E}_s, \vec{H}_s, \quad s = 1, 2, 3.$$

Subscripts 1, 2, 3: Incident, transmitted and reflected waves. Only the total of three solve the problem. Vector component subscripts are coordinates  $q = x, y, z$ . For the incident wave we assume  $k_{1y} = 0$ .


**E-pol.** ( $\vec{E}_s = E_s \vec{e}_y \parallel \text{boundary plane}, E_{sz} = 0$ , TE- or H-wave), or  
**H-pol.** ( $\vec{H}_s = H_s \vec{e}_y \parallel \text{boundary plane}, H_{sz} = 0$ , TM- or E-wave).

Example for transverse *E*- and *H*-components in boundary  $x = 0$ :

$$E_{2y} \exp[-j(\underbrace{k_{2x}x}_{x=0} + \underbrace{k_{2y}y}_{\rightarrow 0} + k_{2z}z)] = E_{1y} \exp[-j(\underbrace{k_{1x}x}_{x=0} + \underbrace{k_{1y}y}_{=0} + k_{1z}z)] \\ + E_{3y} \exp[-j(\underbrace{k_{3x}x}_{x=0} + \underbrace{k_{3y}y}_{\rightarrow 0} + k_{3z}z)]$$



# Dielectric-Dielectric Interface — Fresnel's Formulae

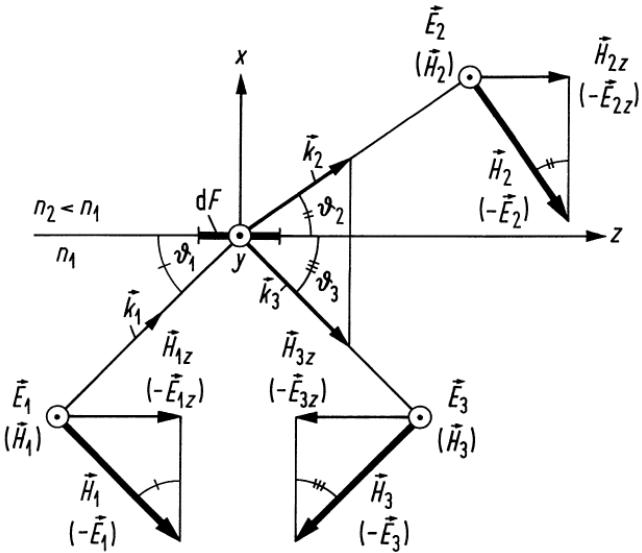

Always  $\vartheta_1 > \vartheta_2$  if  $n_2 < n_1$ .


At  $\vartheta_1 = \vartheta_{1T} \rightarrow \vartheta_2 = 0$ .

Fresnel's formulae:

Amplitude reflection and transmission coefficients as a function of incident angle  $\vartheta_1$  for  $n_1 = 1.5$ ,  $n_2 = 1$  (glass-air interface). Einfallswinkel  $\vartheta_1$  in Grad = incident angle  $\vartheta_1$  in degree

$$r_E = \frac{E_3}{E_1} = \frac{Z_2 - Z_1}{Z_2 + Z_1} = \frac{k_{1x} - k_{2x}}{k_{1x} + k_{2x}} = \frac{n_1 \sin \vartheta_1 - n_2 \sin \vartheta_2}{n_1 \sin \vartheta_1 + n_2 \sin \vartheta_2},$$

$$r_H = \frac{H_3}{H_1} = \frac{Y_2 - Y_1}{Y_2 + Y_1} = \frac{n_2^2 k_{1x} - n_1^2 k_{2x}}{n_2^2 k_{1x} + n_1^2 k_{2x}} = \frac{n_2 \sin \vartheta_1 - n_1 \sin \vartheta_2}{n_2 \sin \vartheta_1 + n_1 \sin \vartheta_2}$$

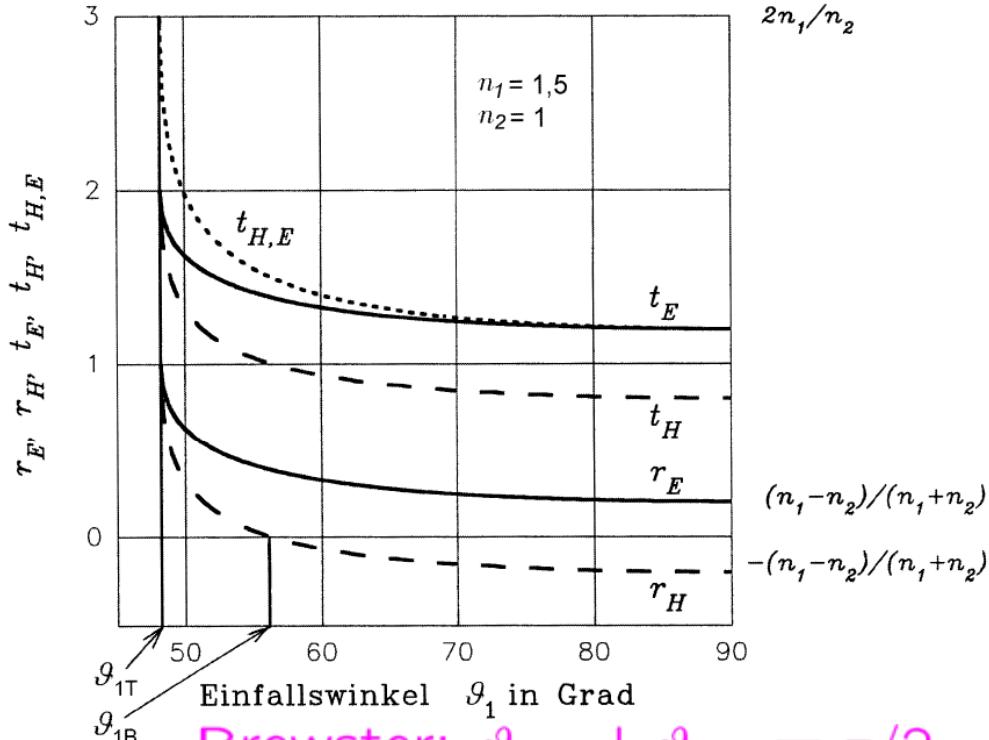

Brewster:  $\vartheta_{1B} + \vartheta_{2B} = \pi/2$



# Outline

- Plasma density oscillation
  - Electron density perturbation
  - Plasma frequency and dispersion diagram
- Modeling the dielectric constant
  - Bound and free charge carriers
  - Free carriers and dielectric constant
- Dielectric-dielectric interface
  - Boundary conditions
  - Fresnel's formulae. Brewster's angle
- Dielectric-metal interface
  - Boundary conditions. Surface plasmon polariton (SPP)
  - Dispersion diagram. Characteristic lengths
  - SSP excitation. SNOM visualization. Applications
- Summary




# Dielectric-Metal Interface

Wanted: A wave that is (in  $x$ -direction) confined to the surface and travels along the  $z$ -axis.

- Generally, all three waves (incident, transmitted, reflected) propagate along  $x$  (and  $z$ ).
- For TIR it is known that transmitted wave is evanescent, and that only incident and reflected waves propagate.
- With a total of three plane waves (and only one boundary) no better confinement is to be expected:
  - If incident wave exists, there must be also a reflected wave.
  - In  $H$ -polarisation and at the Brewster angle, there are only two waves, an “incident” and a “transmitted” wave.
- Try ansatz with  $H$ -polarisation and two plane waves only!



# Dielectric-Metal Interface — Plane Wave Ansatz

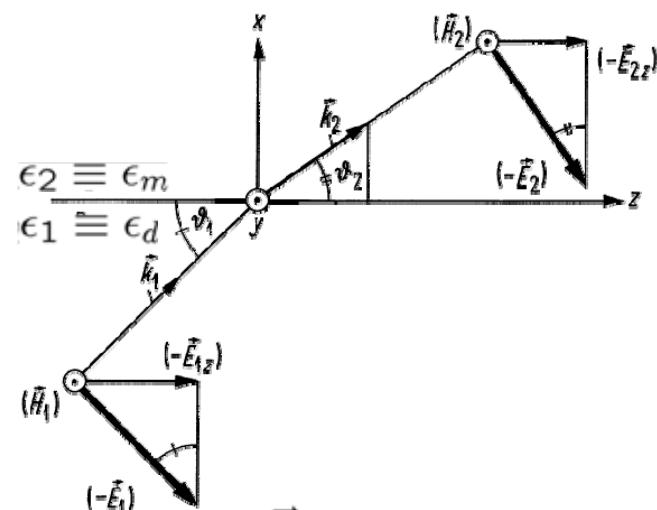

$$\vec{\Psi}(t, \vec{r}) = \vec{\Psi} \exp(j\omega t - j\vec{k}_s \cdot \vec{r}),$$

$$\vec{\Psi}_s = \vec{E}_s, \vec{H}_s, \quad s = 1(d), 2(m)$$

Subscripts 1 (d), 2 (m): “Incident”, “transmitted”. Total of two solves TM problem for **Brewster angle**. Comp. subscr. by coord.  $q = x, y, z$  For incident wave  $k_{dy} = 0$ .

**H-pol.** ( $\vec{H}_s = H_s \vec{e}_y \parallel$  boundary plane,  $H_{sz} = 0$ , TM- or E-wave). **H-field continuous** at  $x = 0 \Rightarrow k_{dz} = k_{mz} = \beta$  and  $H_{dy} = H_{my}$ :

$$H_{dy} \exp[-j(\overbrace{k_{dx}x}^{x=0} + \overbrace{k_{dy}y}^{y=0} + k_{dz}z)] = H_{my} \exp[-j(\overbrace{k_{mx}x}^{x=0} + \overbrace{k_{my}y}^{y=0} + k_{mz}z)]$$

**Ansatz for  $H_y(x, z)$**  substituted in  $\text{curl } \vec{H}(t, \vec{r}) = \epsilon_0 \epsilon_r \frac{\partial \vec{E}(t, \vec{r})}{\partial t}$ :

$$H_y(x, z) = H_y \exp[-j(k_x x + \beta z)], \quad \left. \begin{aligned} & -\partial_z H_y(x, z) \\ & \partial_x H_y(x, z) \end{aligned} \right\} = j\omega \epsilon_0 \epsilon_r \left\{ \begin{aligned} & E_x(x, z) \\ & E_z(x, z) \end{aligned} \right\}$$

$$E_z(x, z) = \frac{-j k_x}{j \omega \epsilon_0 \epsilon_r} H_y(x, z), \quad E_x(x, z) = -\frac{-j \beta}{j \omega \epsilon_0 \epsilon_r} H_y(x, z)$$



# Dielectric-Metal Interface — Boundary Conditions

Amplitude continuity for  $H_y(0, z)$ ,  $E_z(0, z)$  ( $k_{dz} = k_{mz} = \beta$ ):

$$\left. \begin{array}{l} H_{dy} - H_{my} = 0 \\ \frac{k_{dx}}{\epsilon_d} H_{dy} - \frac{k_{mx}}{\epsilon_m} H_{my} = 0 \end{array} \right\} \Rightarrow \frac{k_{dx}}{\epsilon_d} - \frac{k_{mx}}{\epsilon_m} = 0 \quad \Rightarrow \quad \text{Brewster: } \epsilon_m k_{dx} = \epsilon_d k_{mx}$$

Propagation constant of plane waves in both media:

$$\epsilon_d k_0^2 = k_{dx}^2 + \beta^2, \quad \epsilon_m k_0^2 = k_{mx}^2 + \beta^2$$

Propagation constant  $\beta$ :

$$2\beta^2 = (\epsilon_d + \epsilon_m)k_0^2 - \left(\frac{\epsilon_d^2}{\epsilon_m^2} + 1\right)k_{mx}^2 = (\cdot)k_0^2 - (\cdot)(\epsilon_m k_0^2 - \beta^2)$$

$$\beta^2 \left(1 - \frac{\epsilon_d^2}{\epsilon_m^2}\right) = \left(\epsilon_d + \cancel{\epsilon_m} - \frac{\epsilon_d^2}{\epsilon_m} - \cancel{\epsilon_m}\right)k_0^2 = \epsilon_d \left(1 - \frac{\epsilon_d}{\epsilon_m}\right)k_0^2$$

$$\beta^2 = \epsilon_d \frac{\cancel{1 - \frac{\epsilon_d}{\epsilon_m}}}{\cancel{(1 - \frac{\epsilon_d}{\epsilon_m})(1 + \frac{\epsilon_d}{\epsilon_m})}} k_0^2 \quad \Rightarrow \quad \beta^2 = \frac{\epsilon_d \epsilon_m}{\epsilon_d + \epsilon_m} k_0^2$$



# Surface Plasmon Polariton Condition

So far: Brewster angle for lossless media with  $\epsilon_r = \text{const}$  re-derived.

No confinement to boundary for  $\epsilon_d + \epsilon_m > 0$ :

$$k_{dx}^2 = \frac{\epsilon_d^2}{\epsilon_d + \epsilon_m} k_0^2, \quad k_{mx}^2 = \frac{\epsilon_m^2}{\epsilon_d + \epsilon_m} k_0^2, \quad \beta^2 = \frac{\epsilon_d \epsilon_m}{\epsilon_d + \epsilon_m} k_0^2$$

So far: Correctly assuming  $\epsilon_r = \text{const}_\omega$ . Now cheating,  $\epsilon_r \rightarrow \epsilon_r(\omega)$ !

Lossless metal:



$$\epsilon_m(\omega) = 1 - \frac{\omega_p^2}{\omega^2}, \quad \omega_p^2 = \frac{N f_e e^2}{\epsilon_0 m_e}$$

(plasma frequency)

Confinement and propagation (SPP)

for  $\epsilon_d + \epsilon_m(\omega) < 0$  and  $\epsilon_d > 0$ :

$$k_{dx}^2, k_{mx}^2 < 0, \quad \beta^2 > 0$$

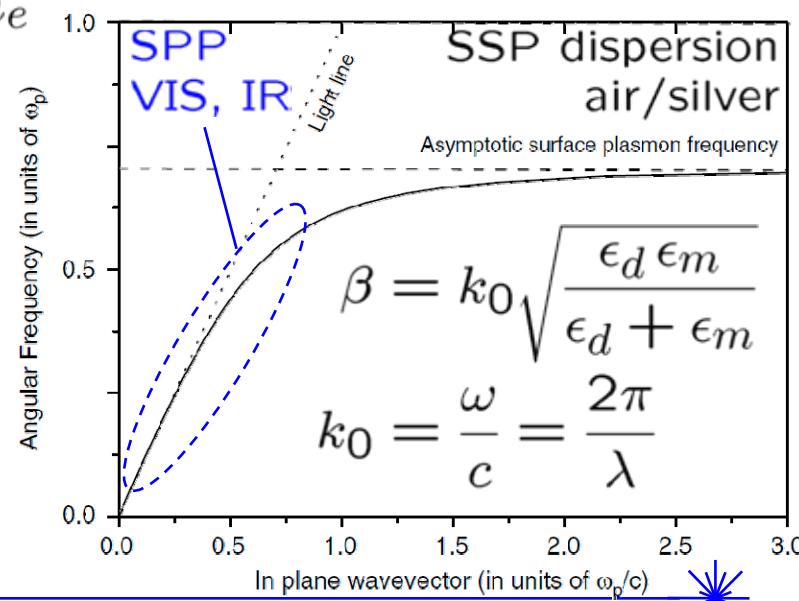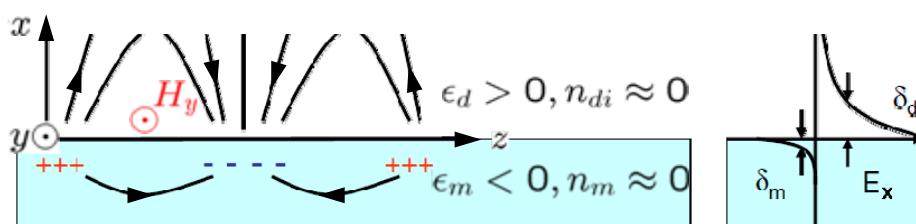

# Dielectric-Metal Interface — Dispersion Relation

Propagation constants in  $x$  and  $z$ -direction ( $\epsilon_m k_{dx} = \epsilon_d k_{mx}$ ):

$$k_{dx}^2 = \frac{\epsilon_d^2}{\epsilon_d + \epsilon_m} k_0^2, \quad k_{mx}^2 = \frac{\epsilon_m^2}{\epsilon_d + \epsilon_m} k_0^2, \quad \beta^2 = \frac{\epsilon_d \epsilon_m}{\epsilon_d + \epsilon_m} k_0^2$$

Lossless metal, dielectric  $\epsilon_d > 0$ :

$$\epsilon_m(\omega) = 1 - \frac{\omega_p^2}{\omega^2}, \quad \omega_p^2 = \frac{N f_e e^2}{\epsilon_0 m_e} \quad (\text{plasma frequency})$$

Surface plasmon ( $\epsilon_d + \epsilon_m = 0$ ):

$$\omega_{sp} = \frac{\omega_p}{\sqrt{\epsilon_d + 1}} \quad \text{for } \beta(\omega_{sp}) \rightarrow \infty$$

$$k_{mx}(\omega_{sp}) \rightarrow \infty$$

$$v_{sp,g} = d\omega/d\beta = 0 \quad k_{dx}(\omega_{sp}) \rightarrow \infty$$


Plasma frequency ( $\epsilon_m = 0$ ):

$$\omega = \omega_p \quad \text{for } \beta(\omega_p) = 0$$

$$k_{mx}(\omega_p) = 0$$

$$k_{dx}(\omega_p) = \sqrt{\epsilon_d} k_0$$

$$\epsilon_m = n_m^2 - n_{mi}^2, \quad \epsilon_{mi} = 2n_m n_{mi} = 0$$

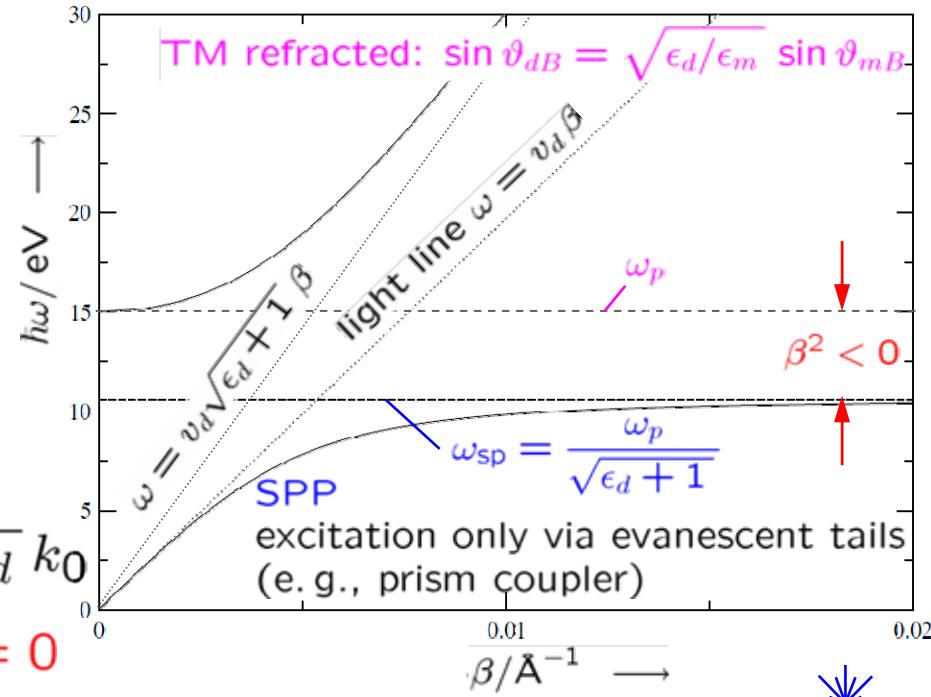

# SPP Penetration Depths

Propagation constants in  $x$  and  $z$ -direction ( $\epsilon_m k_{dx} = \epsilon_d k_{mx}$ ):


$$k_{dx}^2 = \frac{\epsilon_d^2}{\epsilon_d + \epsilon_m} k_0^2, \quad k_{mx}^2 = \frac{\epsilon_m^2}{\epsilon_d + \epsilon_m} k_0^2, \quad \beta^2 = \frac{\epsilon_d \epsilon_m}{\epsilon_d + \epsilon_m} k_0^2$$

Lossless metal, dielectric  $\epsilon_d > 0$ :

$$\epsilon_m(\omega) = 1 - \frac{\omega_p^2}{\omega^2}, \quad \omega_p^2 = \frac{N f_e e^2}{\epsilon_0 m_e} \quad (\text{plasma frequency})$$

Penetrations depths for frequencies  $\omega \ll \omega_{\text{sp}}$ ,  $\epsilon_d + \epsilon_m \approx \epsilon_m \approx -\frac{\omega_p^2}{\omega^2}$ :


$$\delta_d = \frac{1}{|k_{dx}|} \approx \frac{\frac{\omega_p}{\omega}}{\epsilon_d} \frac{c}{\omega} = \frac{c \omega_p}{\epsilon_d} \frac{1}{\omega^2} = \frac{\omega_p}{4\pi^2 \epsilon_d c} \lambda^2$$

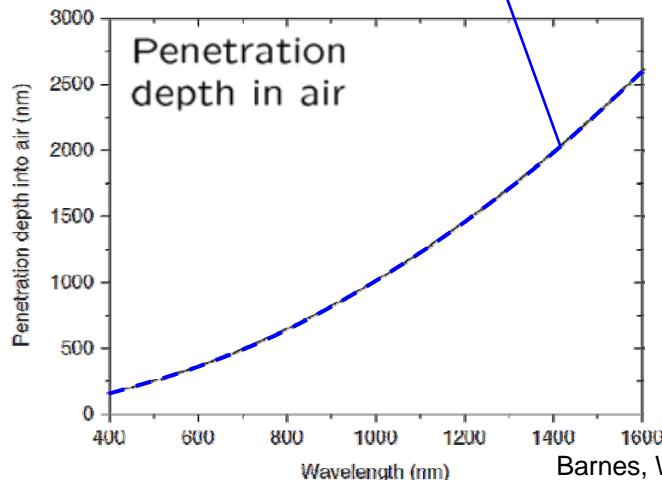

Silver:

$$\epsilon_{\text{Ag}} = 1 - \frac{\omega_p^2}{\omega^2 - j \Gamma \omega}, \\ \omega_p = 2\pi \times 1.91 \text{ PHz} \\ \hat{\equiv} 7.9 \text{ eV} \\ \lambda_p = 157 \text{ nm} \\ \Gamma = 1.45 \times 10^{13} \text{ s}^{-1} \\ \hat{\equiv} 60 \text{ meV}$$

$$\delta_m = \frac{1}{|k_{mx}|} \approx \frac{1}{\omega_p} \frac{c}{\omega} = \frac{c}{\omega_p \omega}$$

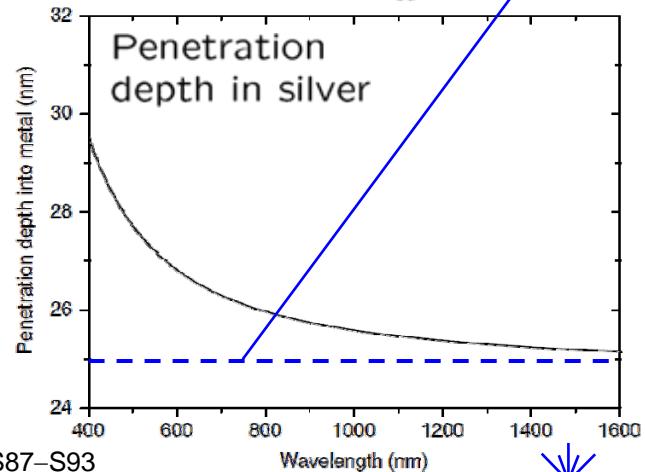

# SPP Wavelength and Propagation Length

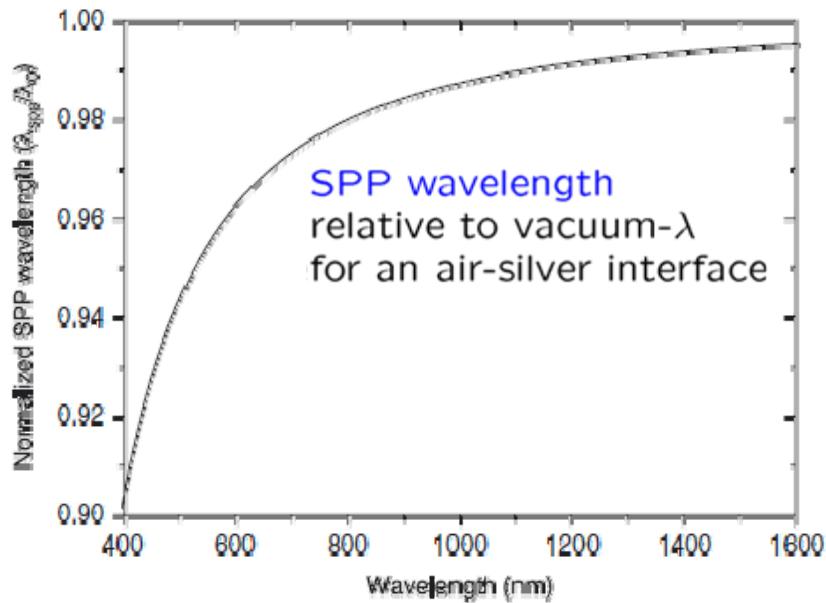


Figure 4. Showing how the normalized surface plasmon-polariton wavelength (i.e. SPP wavelength relative to free space wavelength  $\lambda_{SPP}/\lambda_0$ ) varies with free space wavelength in the visible and near-infrared. The data were computed using the Drude approximation for the relative permittivity of the metal (with  $\omega_p$  and  $\Gamma$  for silver taken to be  $\omega_p = 1.2 \times 10^{16} \text{ rad s}^{-1}$  ( $= 7.9 \text{ eV}$ ) and  $\Gamma = 1.45 \times 10^{13} \text{ s}^{-1}$  ( $= 0.06 \text{ eV}$ ) respectively). The relative permittivity of the dielectric was taken to be equal to 1. Note that in this spectral range the SPP wavelength is only slightly less than the free space wavelength.


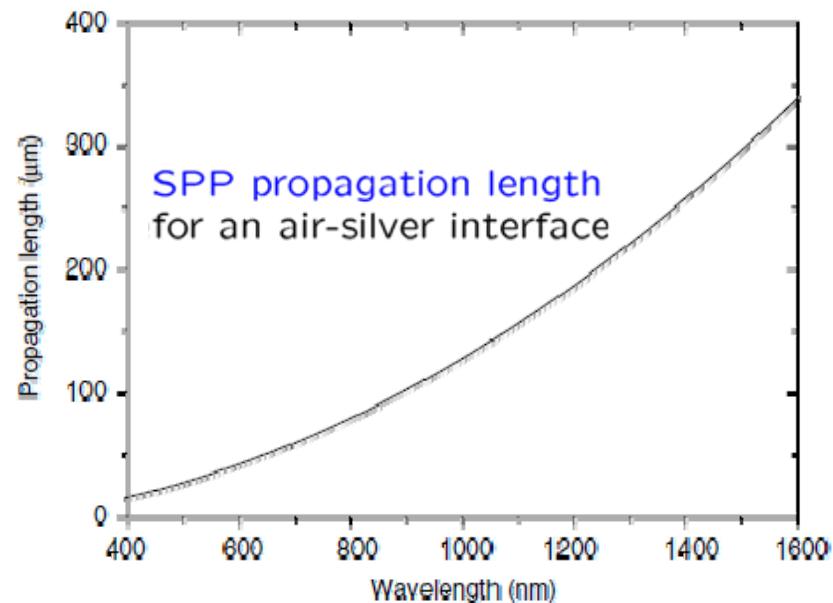


Figure 5. Showing the propagation length of the surface plasmon-polariton. The data were computed using the Drude approximation for the relative permittivity for the metal (with  $\omega_p$  and  $\Gamma$  for silver taken to be  $\omega_p = 1.2 \times 10^{16} \text{ rad s}^{-1}$  ( $= 7.9 \text{ eV}$ ) and  $\Gamma = 1.45 \times 10^{13} \text{ s}^{-1}$  ( $= 0.06 \text{ eV}$ ) respectively). The relative permittivity of the dielectric was taken to be equal to 1. Note that in calculating these data we have assumed that there is no radiative damping, specifically that there is no mechanism by which SPPs can be converted to light, e.g. by the presence of a prism or grating coupler.




# Long-Reach Coupled Surface Plasmon Polaritons

**Electric field distribution of coupled surface plasmons supported by a thin metal film “sandwiched” between two identical dielectric layers.**

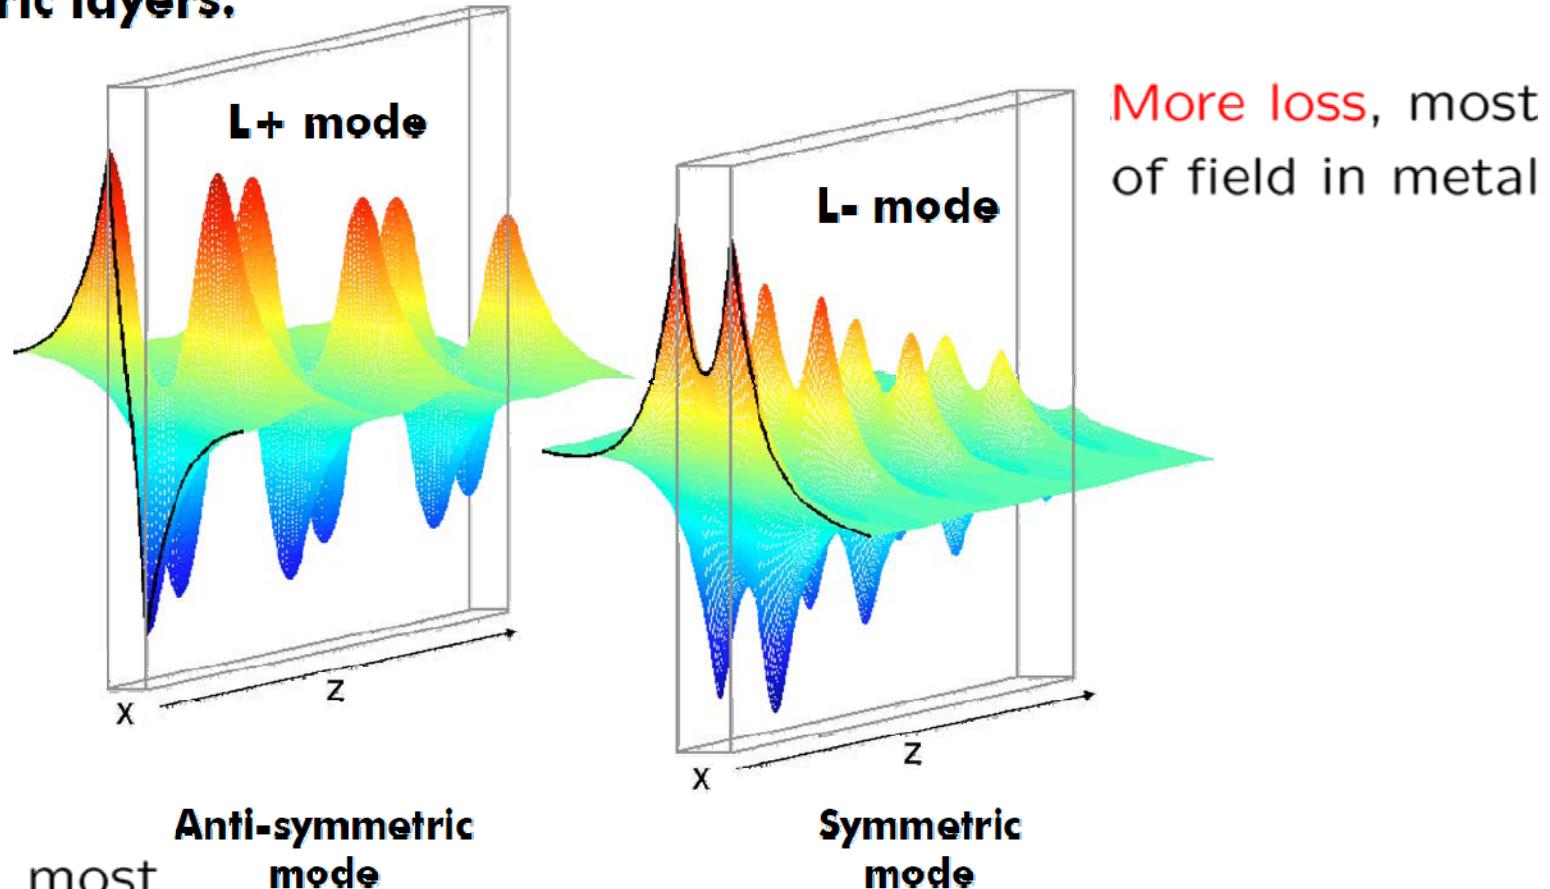

J. A. Dionne et al., Phys. Rev. B 72, 075405 (2005)


# Long-Reach Coupled Surface Plasmon Polaritons

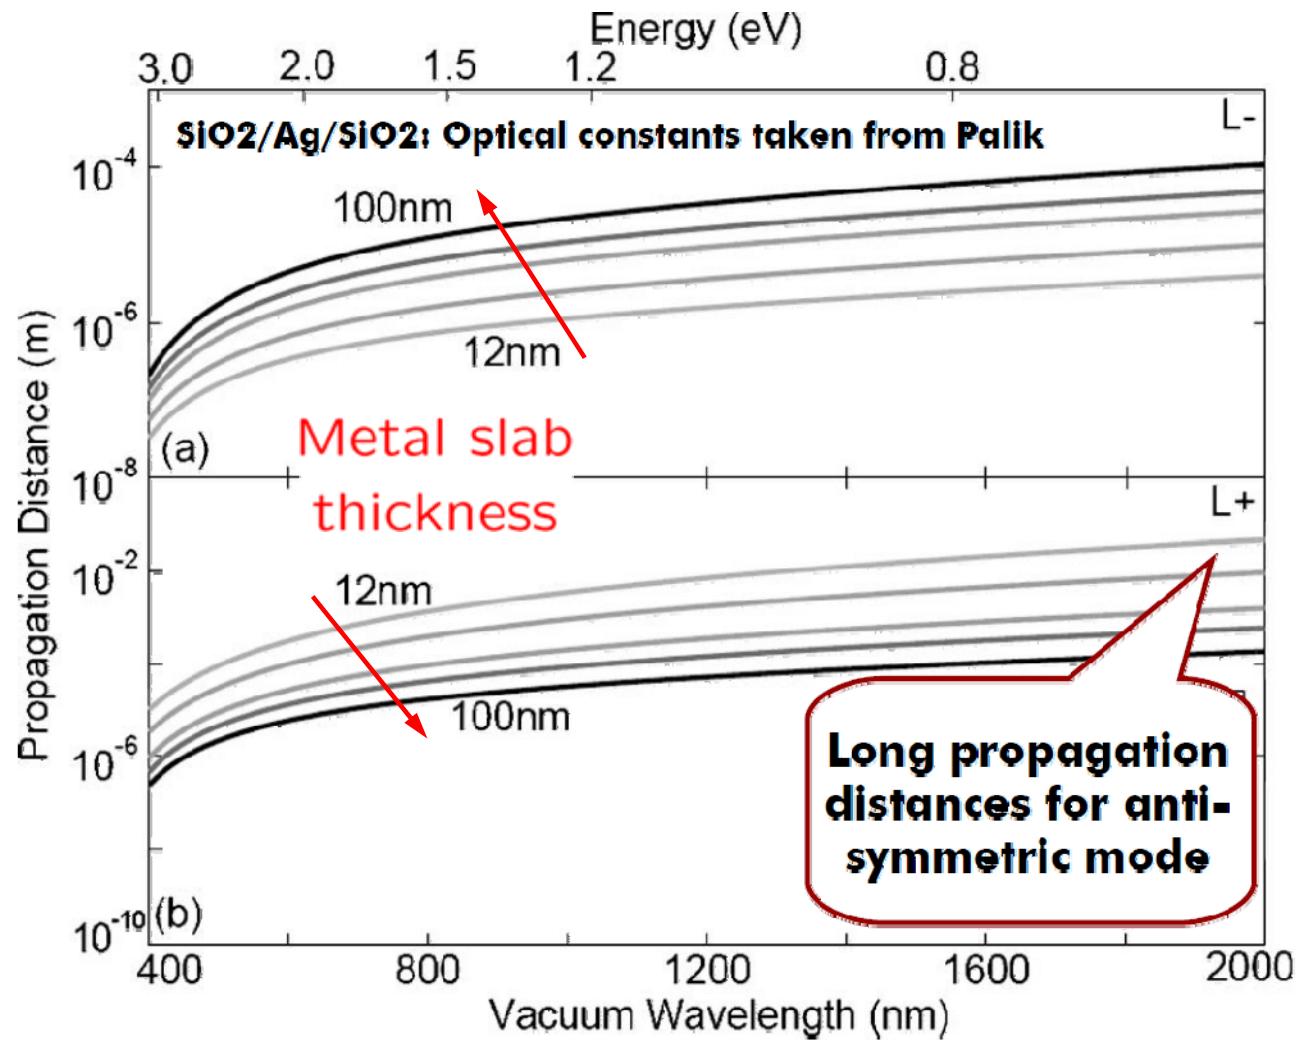

J. A. Dionne et al., Phys. Rev. B 72, 075405 (2005)

# Surface Plasmon Polariton Excitation

Prism couplers: Frustrated total internal reflection

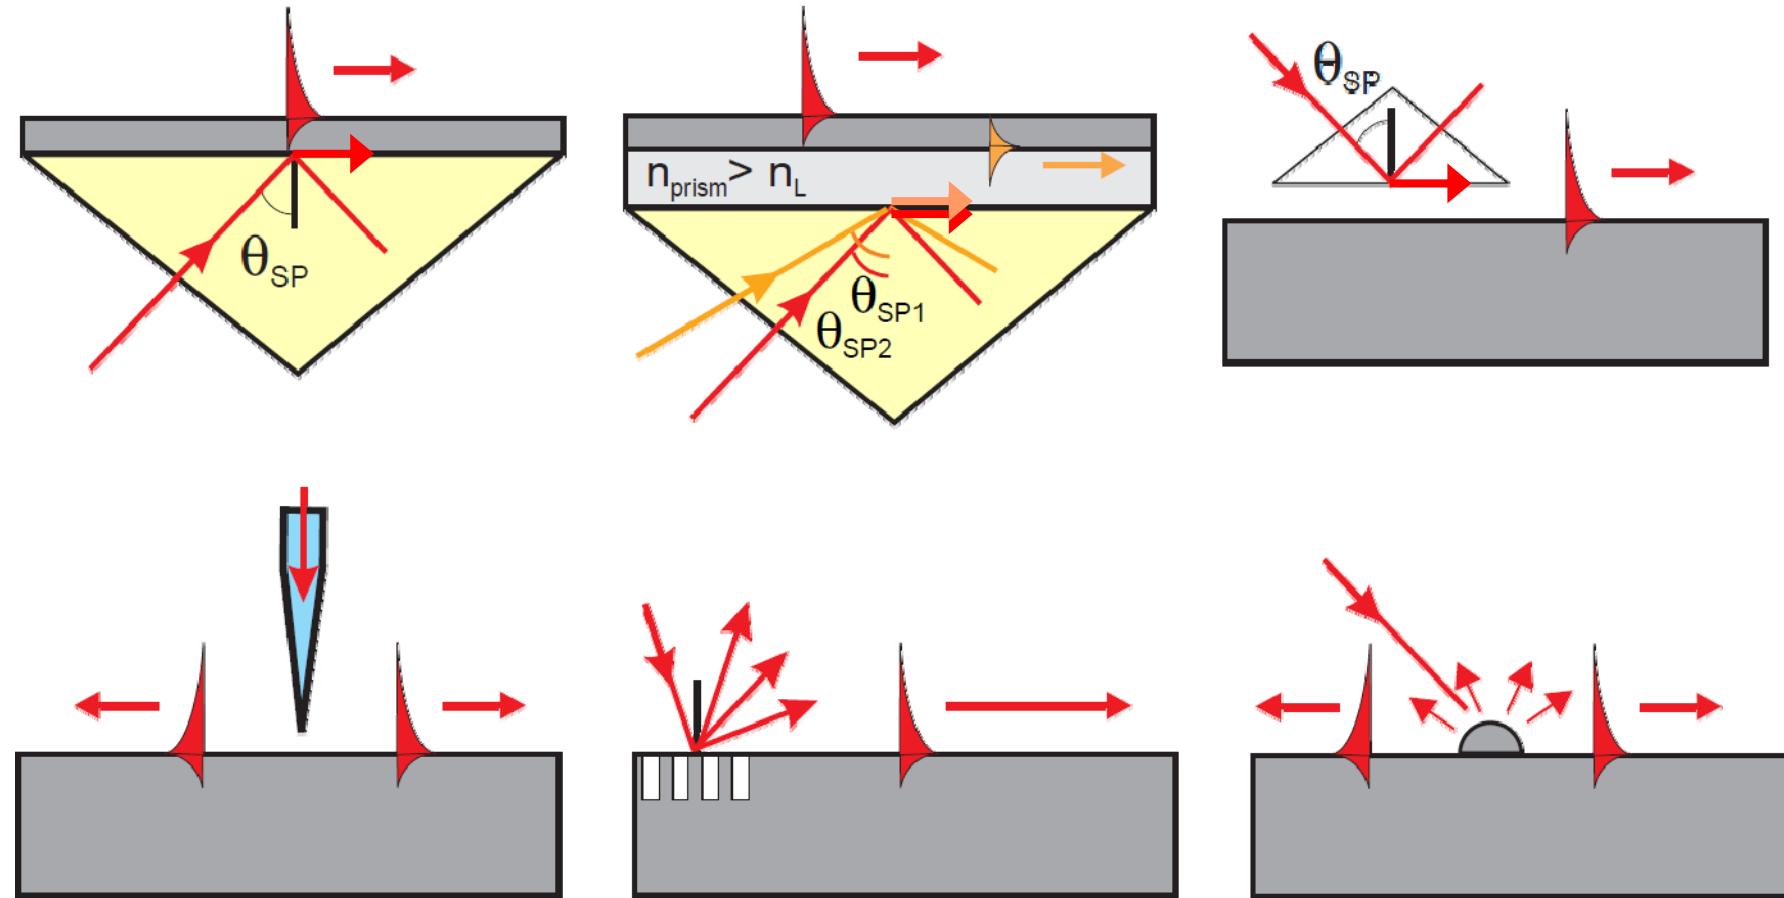

Diffraction couplers: SNOM, grating, scattering at rough surface




# Outline

- Plasma density oscillation
  - Electron density perturbation
  - Plasma frequency and dispersion diagram
- Modeling the dielectric constant
  - Bound and free charge carriers
  - Free carriers and dielectric constant
- Dielectric-dielectric interface
  - Boundary conditions
  - Fresnel's formulae. Brewster's angle
- Dielectric-metal interface
  - Boundary conditions. Surface plasmon polariton (SPP)
  - Dispersion diagram. Characteristic lengths
  - SSP excitation. SNOM visualization. Applications
- Summary



# Surface Plasmon Polariton Seen by SNOM


a

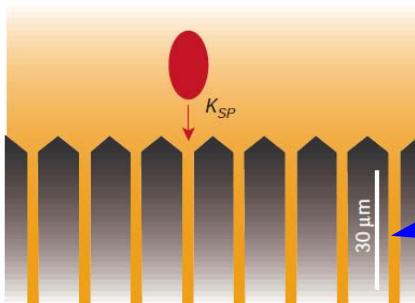

An SP waveguide:

a, A scanning electron micrograph image of a 40 nm thick, 2.5  $\mu\text{m}$  wide gold stripe lying on a glass substrate.

b

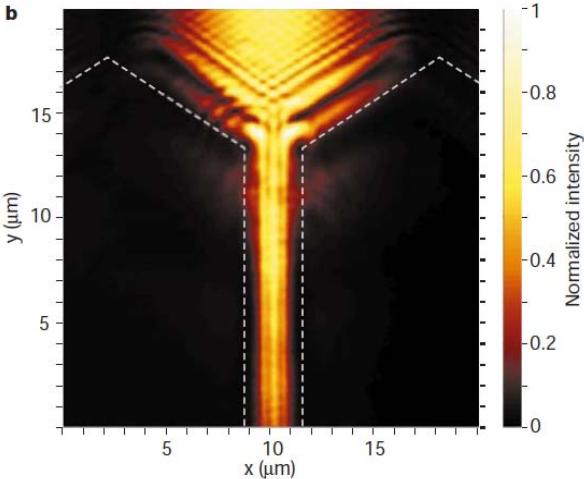

b, The optical functionality of the stripe visualized by photon scanning tunnelling microscopy (PSTM) or scanning nearfield optical microscopy (SNOM); an extended SP, launched on the larger area by a spot (indicated by the red ellipse) generated by total internal reflection illumination ( $\lambda = 800 \text{ nm}$ ) through the substrate, is used to excite one of the stripe's SP eigen modes featuring three maxima. The PSTM image demonstrates that SPs are bound to the metal.

c, A cross-section across the stripe shows that this mode is much better confined to the guiding material (indicated by the AFM topology — pale blue line) sustaining the mode than would be the case in dielectric-based waveguides.

Not only the height of the guide but also the square root of the waveguide cross-section features a subwavelength size, underlining the fact that the SP mode is essentially bound to the metal surface rather than being a standing wave confined inside the metal volume.

Barnes, W. L.; Dereux, A.; Ebbesen, T. W.: Surface plasmon subwavelength optics. *Nature* 424 (2003) 824–830



# Outline

- Plasma density oscillation
  - Electron density perturbation
  - Plasma frequency and dispersion diagram
- Modeling the dielectric constant
  - Bound and free charge carriers
  - Free carriers and dielectric constant
- Dielectric-dielectric interface
  - Boundary conditions
  - Fresnel's formulae. Brewster's angle
- Dielectric-metal interface
  - Boundary conditions. Surface plasmon polariton (SPP)
  - Dispersion diagram. Characteristic lengths
  - SSP excitation. SNOM visualization. Applications
- Summary



# Metamaterials with Negative Refractive Index


**Metamaterials:** Macroscopic composites having a manmade, mostly 3D and periodic ( $a \ll \lambda_e$ ) cellular architecture designed to produce, e. g., a negative refractive index  $n = -\sqrt{\epsilon_r \mu_r}$ .



$$n = +1.33$$



$$n = -1.33$$

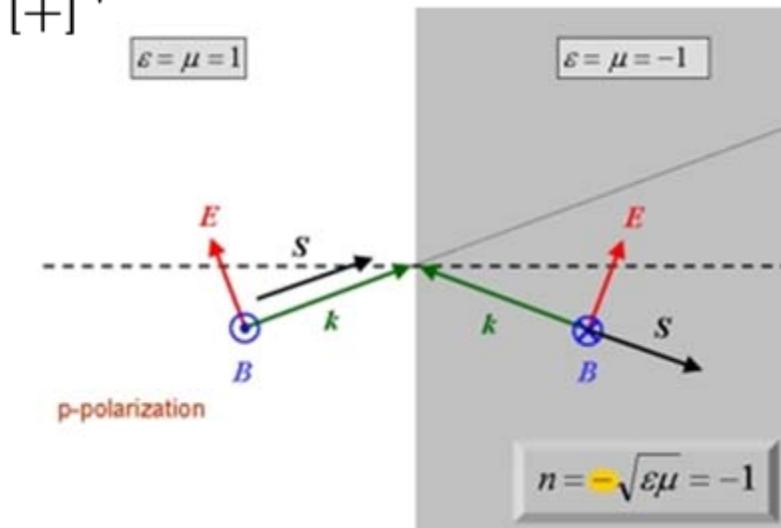

Martin Wegener's group at the Institute of Applied Physics, University of Karlsruhe — <http://www.aph.uni-karlsruhe.de/wegener/en/research/photonic-crystals>


**Equivalent of an optical cloaking experiment:**  
Water with sugar solution acts as graded-index guide. Laser beam travels around an object.

Gießen, H.: Öffentliche Vorlesung über Tarnkappen im Mercedes Museum am 22.7.2008.  
<http://www.pi4.uni-stuttgart.de/>




# Metamaterials in the Microwave Range — Cloaking



**Metamaterials:** Macroscopic composites having a manmade, mostly 3D and periodic ( $a \ll \lambda_e$ ) cellular architecture designed to produce, e. g., a negative refractive index  $n = -\sqrt{\epsilon_r \mu_r}$ .

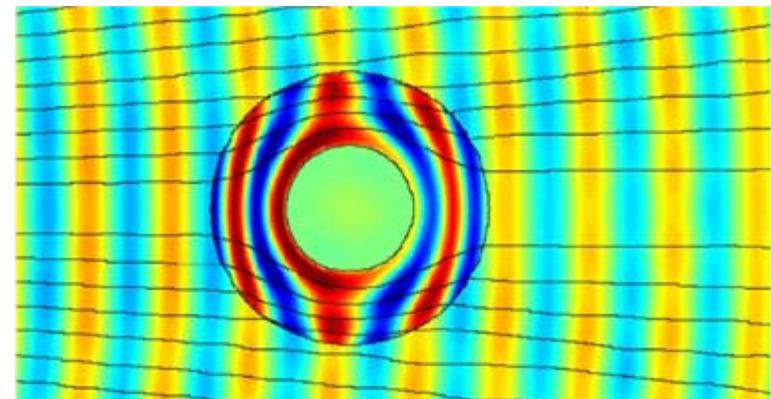

$$[+] \quad n = -\sqrt{\epsilon_r \mu_r}$$

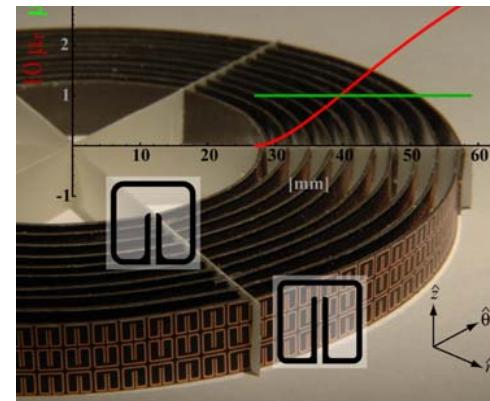

Schurig, D.; Mock, J. J.; Justice, B. J.; Cummer, S. A.; Pendry, J. B.; Starr, A. F.; Smith, D. R.: Metamaterial electromagnetic cloak at microwave frequencies. *Scienceexpress* <http://www.scienceexpress.org> 19 Oct 2006 10.1126/science.1133628

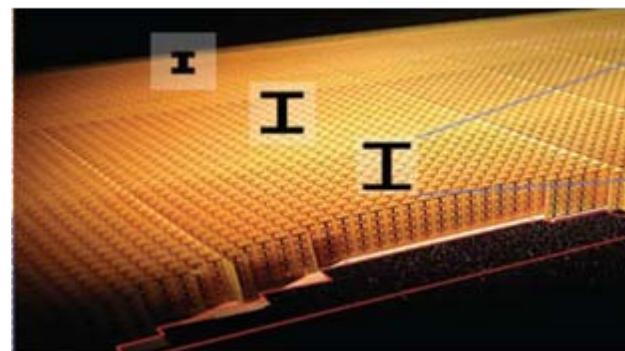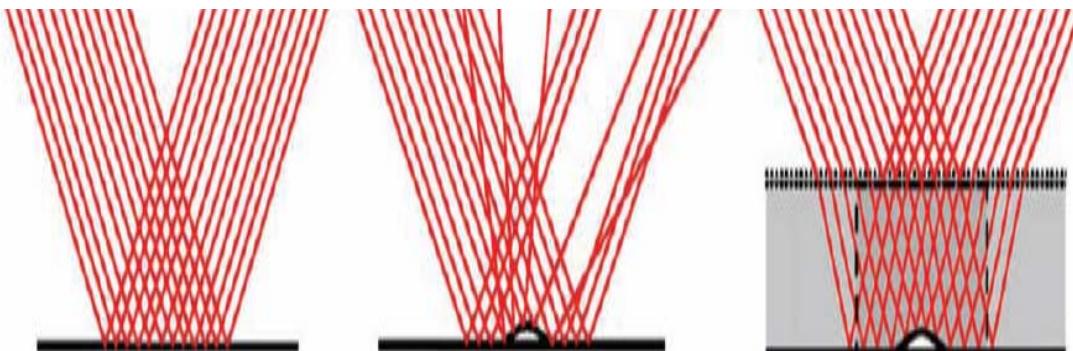


Liu, R.; Ji, C.; Mock, J. J.; chin, J. Y.; Cui, T. J.; Smith, D. R.: Broadband ground-plane cloak. *Science* 323 (2008) 366–369



# Metamaterials in the Optical Range — Towards an Ideal Lens?

**Metamaterials:** Macroscopic composites having a manmade, mostly 3D and periodic ( $a \ll \lambda_e$ ) cellular architecture designed to produce, e. g., a negative permeability  $\mu_r < 0$ .

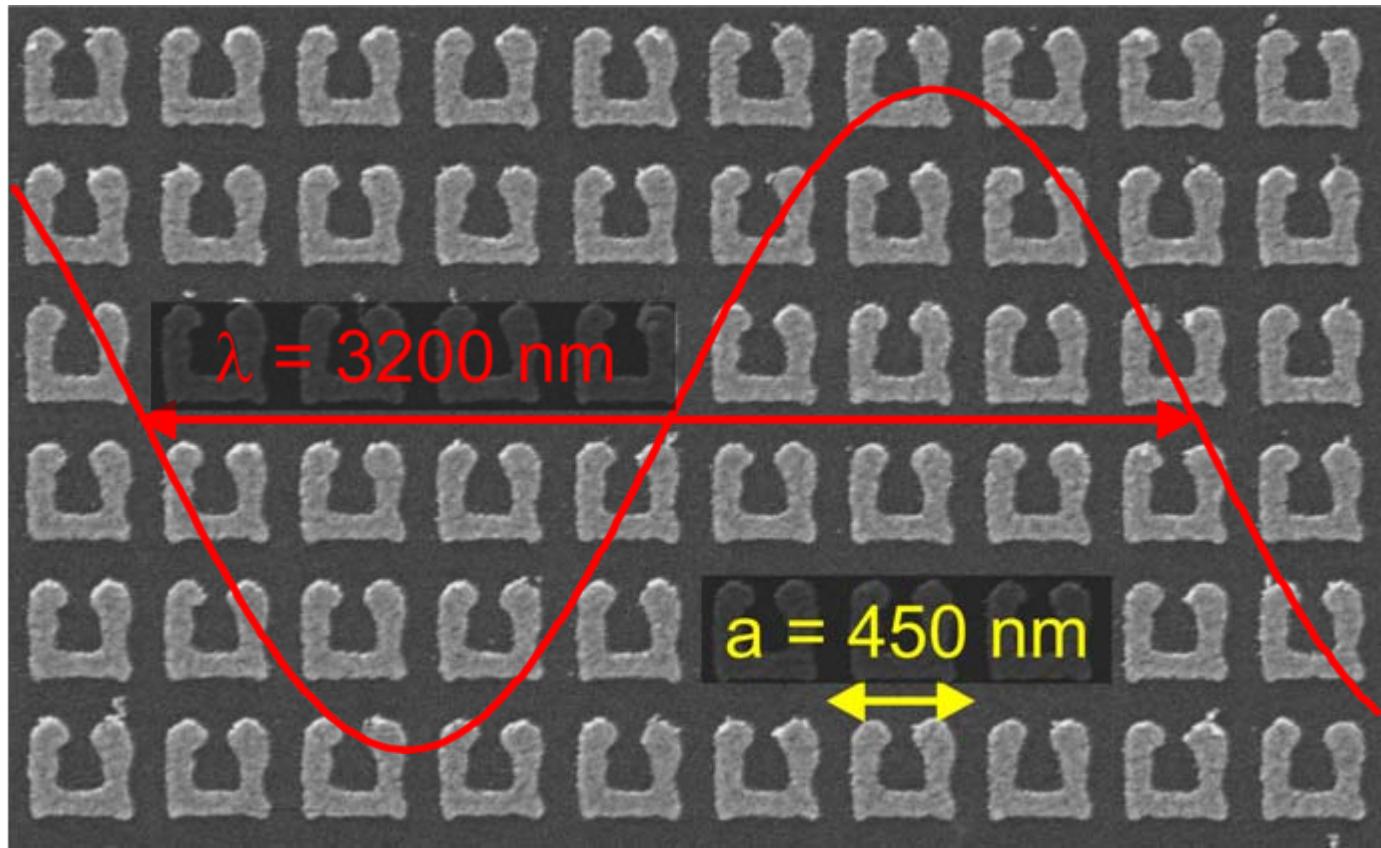


Linden, S.; Enkrich, C.; Wegener, M.; Zhou, J.; Koschny, T.; Soukoulis, C. M.: Magnetic Response of Metamaterials at 100 Terahertz. Science 306 (2004) 1351–1353


# Imaging With a Negative Refractive Index Lens or a Silver Slab

Negative refractive index defined as  $n^2 = \epsilon_r \mu_r$ . For  $\epsilon_r < 0$  and  $\mu_r < 0$  the choice of the negative sign for  $n = \pm \sqrt{\epsilon_r \mu_r}$  is enforced to be consistent with Maxwell's equations (Victor Veselago, 1968), so  $n = -\sqrt{\epsilon_r \mu_r}$ . Rays are refracted “the wrong direction”.  
[+]

Ideal imaging: Evanescent waves “carried through” slab with  $n < 0$ . If all dimensions  $d$  (lens, object) have  $d \ll \lambda \rightarrow \vec{E}$  and  $\vec{H}$  decoupled. Object as described by  $\vec{E}$ -field alone ( $\vec{H}$  irrelevant!) can be imaged by silver slab with  $\epsilon_r < 0$ ,  $\mu_r > 0$ . SPP excited, evanescent wave is also “carried through”.

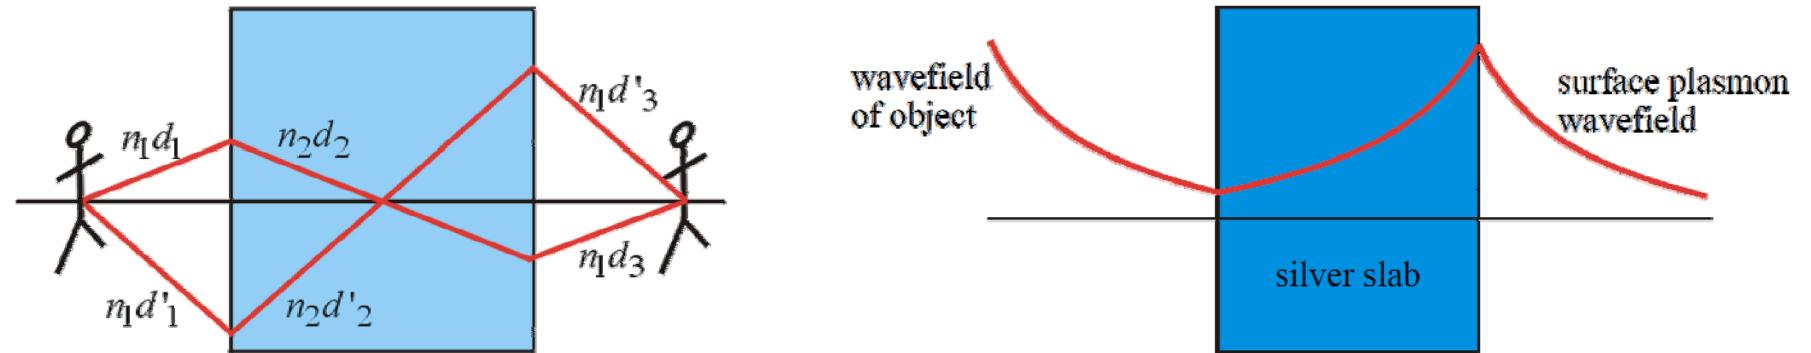

# Surface Plasmon Polaritons in a Silver Layer

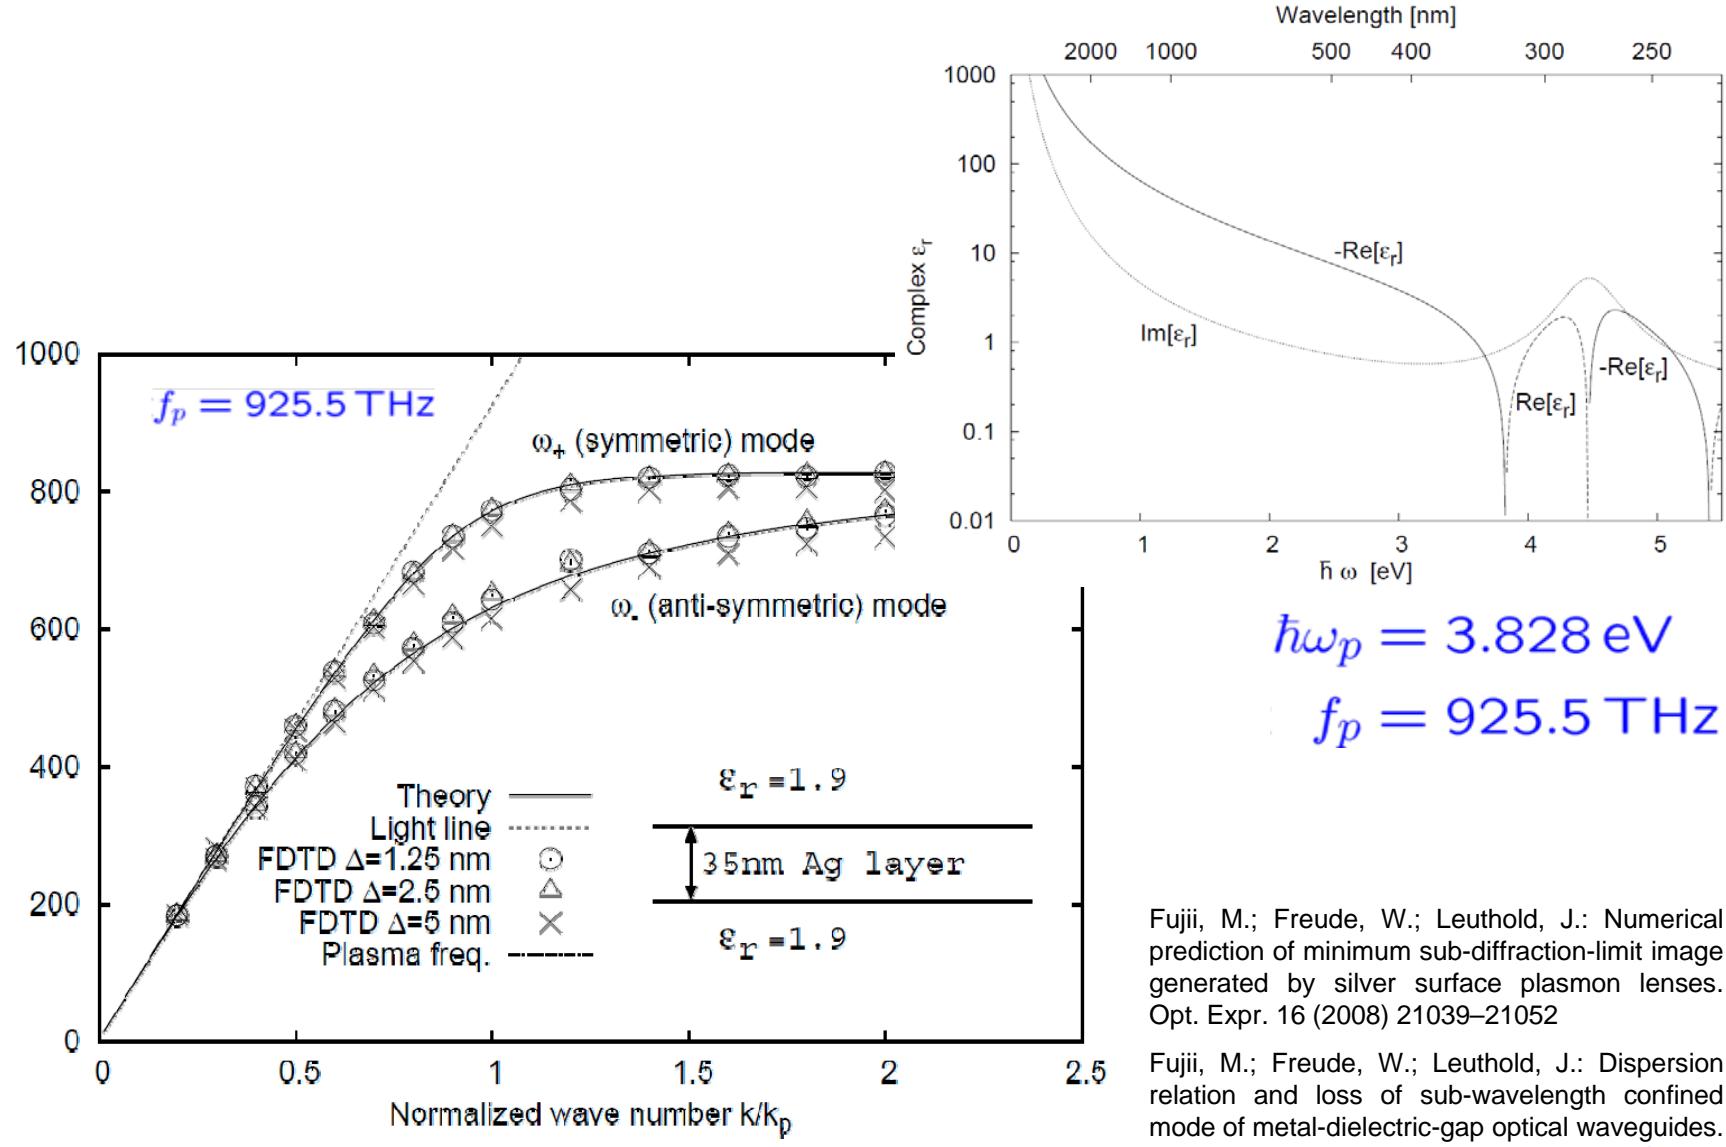

Fujii, M.; Freude, W.; Leuthold, J.: Numerical prediction of minimum sub-diffraction-limit image generated by silver surface plasmon lenses. Opt. Expr. 16 (2008) 21039–21052

Fujii, M.; Freude, W.; Leuthold, J.: Dispersion relation and loss of sub-wavelength confined mode of metal-dielectric-gap optical waveguides. IEEE Photon. Technol. Lett. 21 (2009) 362–364

# Super-Resolution with Sub-Diffraction Imaging



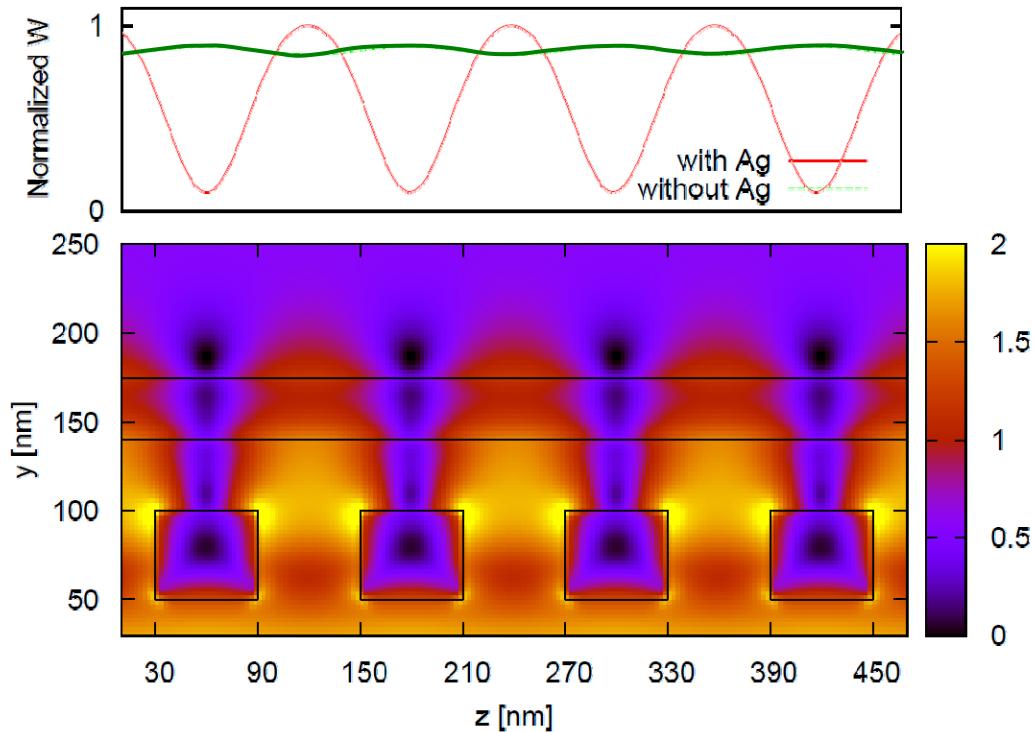


Fig. 4. Imaging of a grating (60 nm wide slit and 60 nm wide Cr mask). Top: a linear scale profile of the grating image obtained by integrating the energy dissipation  $W$  in the photo-resist layer observed at height 180 nm. The image profile for the case of no silver layer is plotted for comparison. Bottom: the distribution of  $W$  on the cross section in a logarithmic magnitude color scale. The black solid lines indicate the boundaries of the  $\text{Ag}$  film (140 nm to 175 nm in height) and  $\text{Cr mask}$  of the grating (50 nm to 100 nm in height).



Fujii, M.; Freude, W.; Leuthold, J.: Numerical prediction of minimum sub-diffraction-limit image generated by silver surface plasmon lenses. Opt. Expr. 16 (2008) 21039–21052

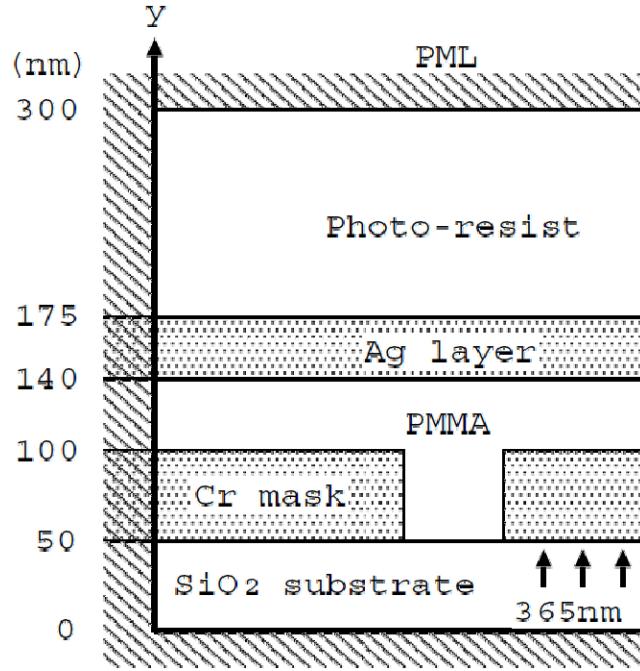


# Imaging “Letter T” With a Silver Slab

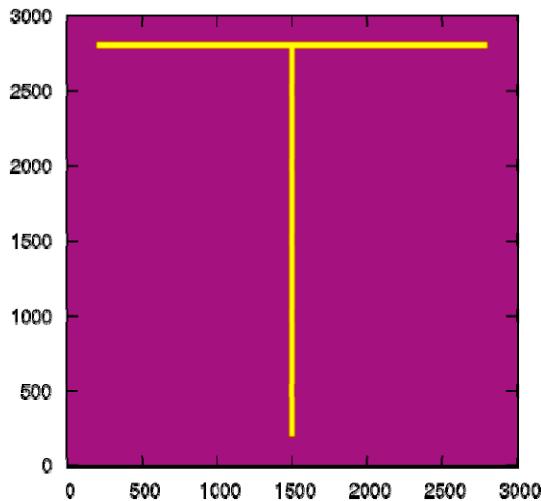

Chromium mask with  
40 nm wide PMMA slots ( $\epsilon_r = 2.4$ )

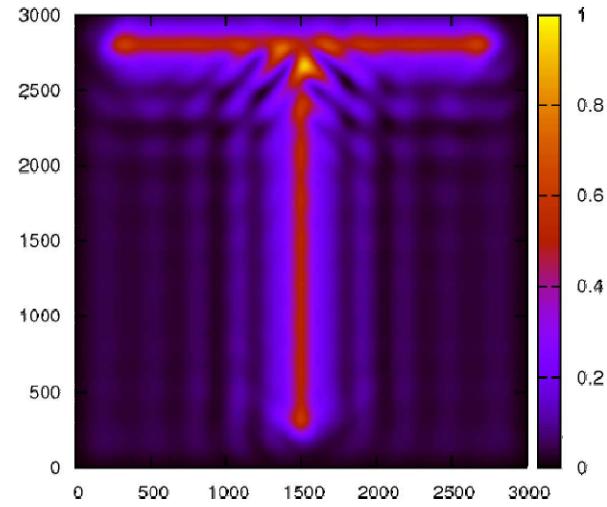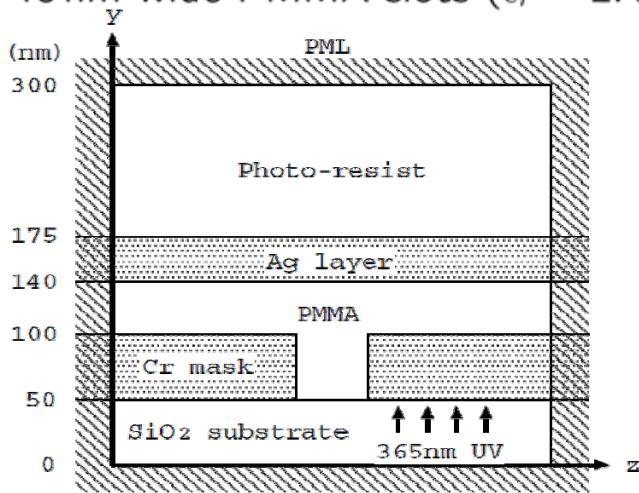

Intensity in resist without  
and  
with silver slab

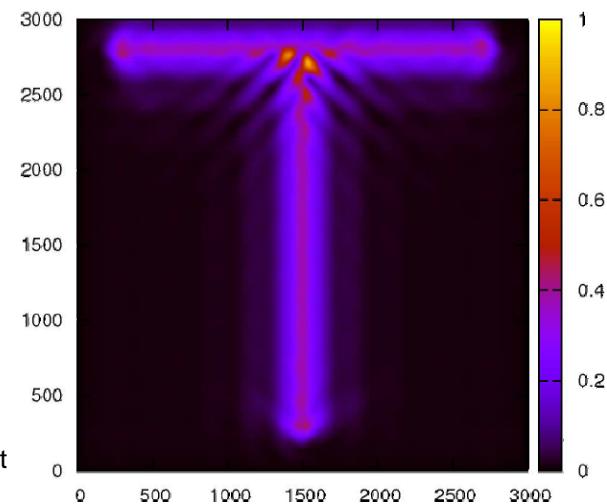

Fujii, M.; Freude, W.; Leuthold, J.: Numerical prediction of minimum sub-diffraction-limit image generated by silver surface plasmon lenses. Opt. Expr. 16 (2008) 21039–21052



# Outline

- Plasma density oscillation
  - Electron density perturbation
  - Plasma frequency and dispersion diagram
- Modeling the dielectric constant
  - Bound and free charge carriers
  - Free carriers and dielectric constant
- Dielectric-dielectric interface
  - Boundary conditions
  - Fresnel's formulae. Brewster's angle
- Dielectric-metal interface
  - Boundary conditions. Surface plasmon polariton (SPP)
  - Dispersion diagram. Characteristic lengths
  - SSP excitation. SNOM visualization. Applications
- **Summary**





# Surface Plasmon Polariton — Overview

## Surface plasmon polariton (SPP) [1]–[10]

- SPP history is older than 100 years (Drude 1889–1904 [1]–[3]).
- Plasmonic waves are collective electronic excitations generated by an electromagnetic field exciting a metal/dielectric interface.
- Fields confined to and propagating along interface → **SPP**

SPP length scales (including losses; data and figures from [8]):



- Spat. period  $\lambda_{\text{SPP}} < \lambda \approx 1 \mu\text{m}$
- Penetr. depth  $\delta_{m;d} \approx 30; 300 \text{ nm}$
- Prop. length  $\delta_{\text{SPP}} \approx 30 \dots 300 \mu\text{m}$   
long reach  $\delta_{\text{LRSPP}} \lesssim 3000 \mu\text{m}$

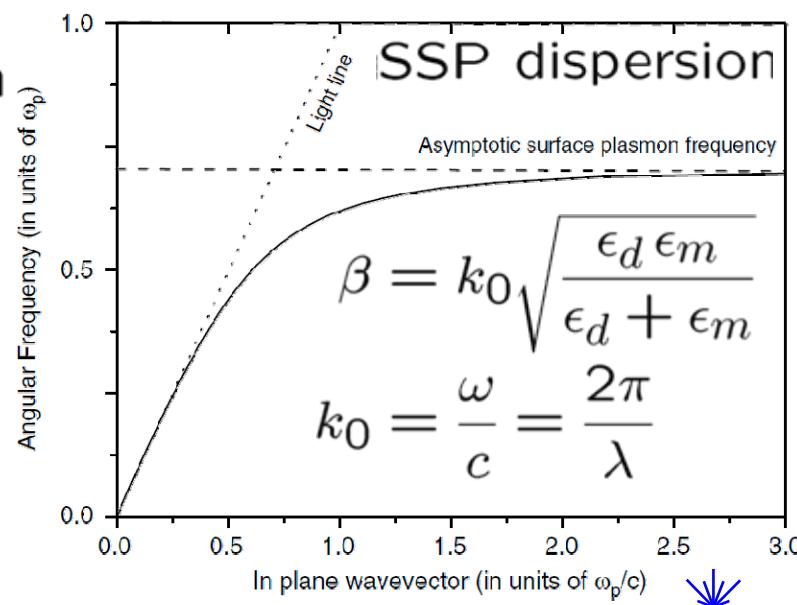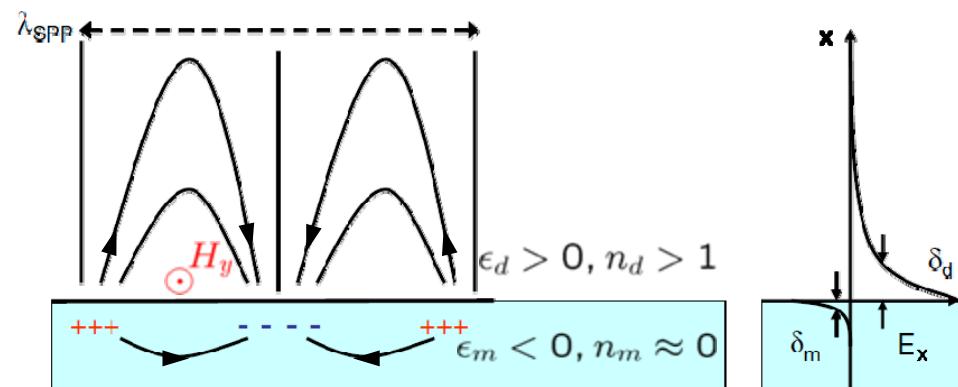

# Surface Plasmon Polariton — Boundary Conditions

SPP length scales (with losses):

- Spat. period  $\lambda_{\text{SPP}} < \lambda \approx 1 \mu\text{m}$
- Penetr. depth  $\delta_{m;d} \approx 30; 300 \text{ nm}$
- Prop. length  $\delta_{\text{SPP}} \approx 30 \dots 300 \mu\text{m}$   
long reach  $\delta_{\text{LRSP}} \lesssim 3000 \mu\text{m}$

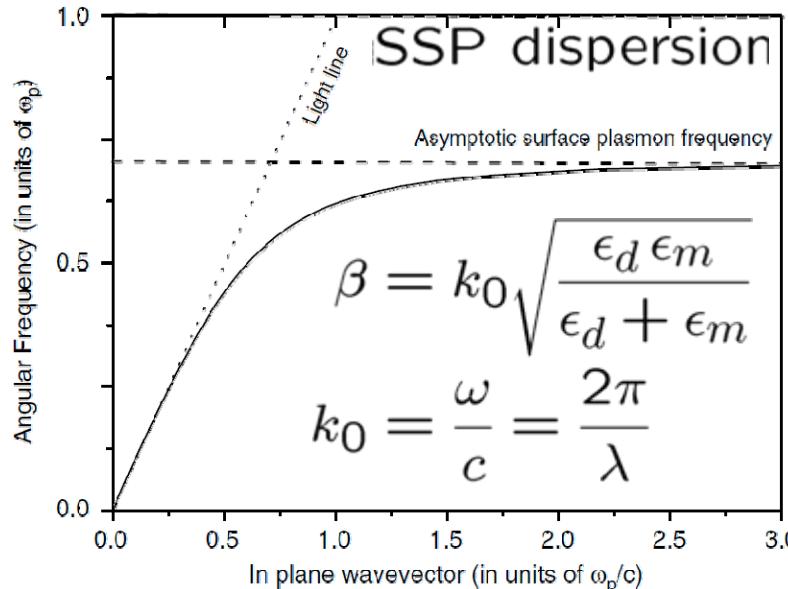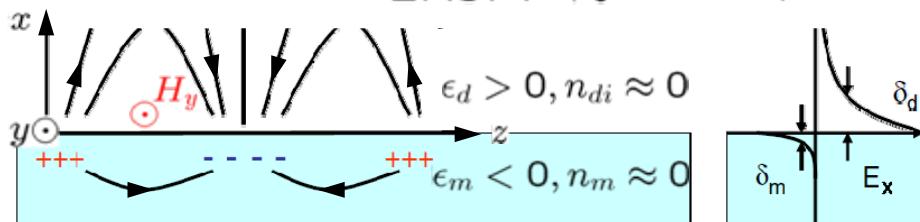

Boundary conditions (SPP involves *charges* at metal surface):

- Normal electric field ( $E_x$ ) *changes sign* at interface.
- Normal displacement ( $D_x = \epsilon_0 \epsilon_r E_x$ ) continuous  $\rightarrow \epsilon_m < 0$
- Example:  $\epsilon_{\text{Au}} \approx -29 - j2.1$  at  $\lambda = 830 \text{ nm}$

$$\bar{\epsilon}_r = \epsilon_r - j \epsilon_{ri} = (n - j n_i)^2 = n^2 - n_i^2 - j 2 n n_i, \text{ "no" losses:}$$



$$\text{real } \bar{\epsilon}_r = n^2 - n_i^2, \epsilon_{ri} = 2 n n_i = 0 \rightarrow \bar{\epsilon}_r = \begin{cases} n^2 & \text{for } n_i = 0 \\ -n_i^2 & \text{for } n = 0 \end{cases}$$



# Surface Plasmon Polariton — Propagation Results

SPP length scales (with losses):

- Spat. period  $\lambda_{\text{SPP}} < \lambda \approx 1 \mu\text{m}$
- Penetr. depth  $\delta_{m;d} \approx 30; 300 \text{ nm}$
- Prop. length  $\delta_{\text{SPP}} \approx 30 \dots 300 \mu\text{m}$   
long reach  $\delta_{\text{LR SPP}} \lesssim 3000 \mu\text{m}$

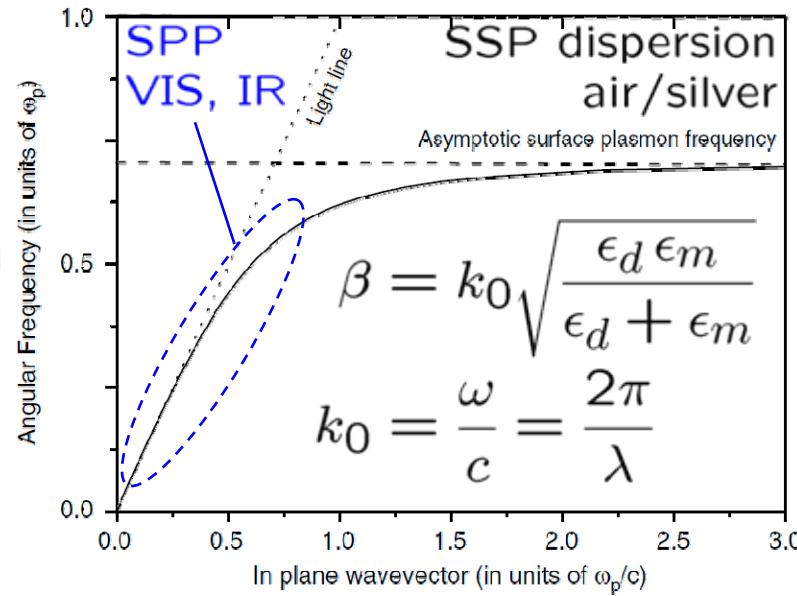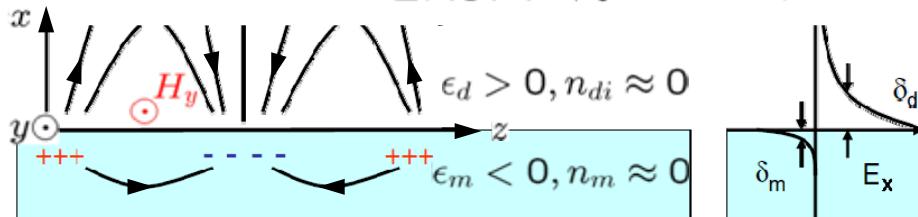

$$\bar{\epsilon}_r = \epsilon_r - j\epsilon_{ri} = (n - j n_i)^2 = n^2 - n_i^2 - j 2 n n_i, \text{ “no” losses:}$$

$$\text{real } \bar{\epsilon}_r = n^2 - n_i^2, \epsilon_{ri} = 2 n n_i = 0 \rightarrow \bar{\epsilon}_r = \begin{cases} n^2 & \text{for } n_i = 0 \\ -n^2 & \text{for } n = 0 \end{cases}$$

Propag. const.  $\beta > k_0 \sqrt{\epsilon_d}$  shows that SPP-mode is non-radiative.



No coupling from outside! Coupling with, e. g., a prism coupler.

Dielectr. const. in metal  $\epsilon_m = 1 - \frac{\omega_p^2}{\omega^2}$  more negative with  $\omega \downarrow$ . Limiting case  $\epsilon_d + \epsilon_m = 0$ , then  $\beta \rightarrow \infty$ ,  $\lambda_{\text{SPP}} \rightarrow 0$  for  $\omega \rightarrow \omega_p / \sqrt{\epsilon_d + 1}$ .

# Surface Plasmon Polariton — Summary

SPP length scales (with losses):

- Spat. period  $\lambda_{\text{SPP}} < \lambda \approx 1 \mu\text{m}$
- Penetr. depth  $\delta_{m;d} \approx 30; 300 \text{ nm}$
- Prop. length  $\delta_{\text{SPP}} \approx 30 \dots 300 \mu\text{m}$   
long reach  $\delta_{\text{LR SPP}} \lesssim 3000 \mu\text{m}$

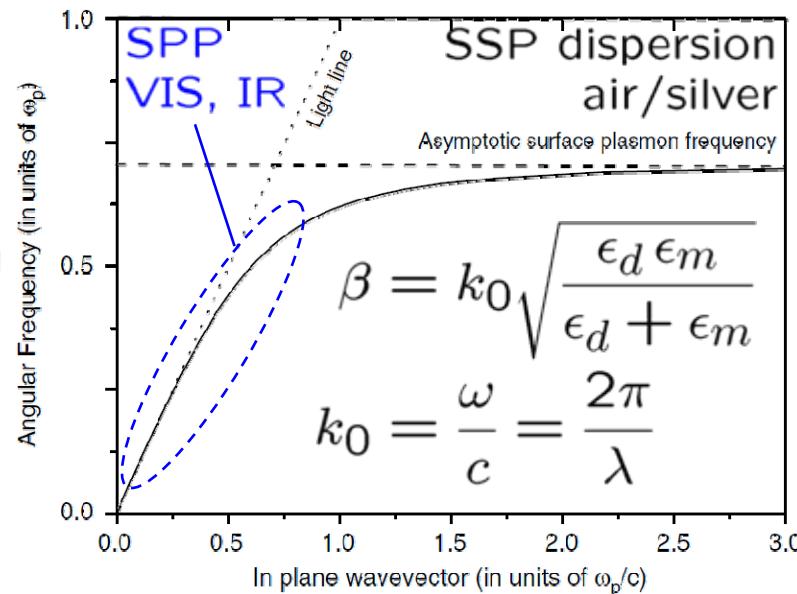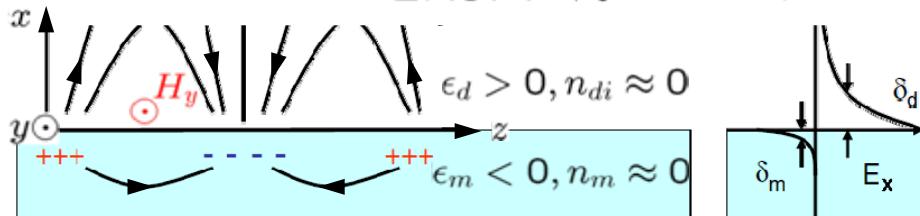

SPP properties — summary:

- Surface charge  $\rightarrow$  *normal* electric field  $E_x$ , consequently also  $E_z$ :  $E$ -wave, TM wave with  $H_y$ . No  $H$ -wave ( $\cong$  TE wave)!
- Because sign of  $E_x$  changes: Field enhancement at boundary
- $n_m \approx 0$ ,  $n_{mi}^2 = |\epsilon_m| \rightarrow$  no  $x$ -propagation, penetration depths  $\delta_d \approx \lambda/n_d$  and  $\delta_m \approx \lambda/n_{mi}$  (= skin depth)
- Momentum mismatch  $\hbar\beta \geq \hbar k_d \rightarrow$  guiding  $\rightarrow$  coupling issue



# Further Reading (1/2)

## Reviews in plasmonics

- [1] Drude, P.: Ann. Physik 36 (1889), 532; 865 — Ann. Physik 39 (1890) 481  
(Papers nowhere cited with title or full pages, not electronically available: Who read it?)
- [2] Drude, P.: The theory of optics. London: Longmans 1902
- [3] Drude, P.: Optische Eigenschaften und Elektronentheorie, I. & II. Teil. Ann. Physik 14 (1904) 677–725 & 936–961
- [4] Born, M.; Wolf, E.: Principles of optics, 6. Ed. Oxford: Pergamon Press 1980.  
*Erratum:* The 1964 edition contains misprints in Sec. 13.2. Eq. (12)–(14): the subscripts for perpendicular and parallel polarization should be interchanged. *Erratum noted by* Nestell, Jr., J. E.; Christy, R. W.: Derivation of optical constants of metals from thin-film measurements at oblique incidence. Appl. Opt. 11 (1972) 643–651, their Ref. [33]
- [5] Barnes, W. L.; Dereux, A.; Ebbesen, T. W.: Surface plasmon subwavelength optics. Nature 424 (2003) 824–830
- [6] Krenn, J. R.; Weeber, J.-C.: Surface plasmon polaritons in metal stripes and wires. Phil. Trans. R. Soc. Lond. A 362 (2004) 739–756
- [7] Zayats, A. V.; Smolyaninov, I. I.; Maradudin, A. A.: Nano-optics of surface plasmon polaritons. Physics Reports 408 (2005) 131–314
- [8] Barnes, W. L.: Surface plasmon-polariton length scales: a route to sub-wavelength optics. J. Opt. A: Pure Appl. Opt. 8 (2006) S87–S93
- [9] Pitarke, J. M.; Silkin, V. M.; Chulkov, E. V.; Echenique, P. M.: Theory of surface plasmons and surface-plasmon polaritons. Rep. Prog. Phys. 70 (2007) 1–87
- [10] Dragoman, M.; Dragoman, D.: Plasmonics: Applications to nanoscale terahertz and optical devices. Progr. Quantum Electron. 32 (2008) 1–41



# Further Reading (2/2)

## Recent books on plasmonics

- [11] Kawata, S. (Ed.): Near-field optics and surface plasmon polaritons. Berlin: Springer 2001
- [12] Maier, S. A.: Plasmonics: Fundamentals and applications. New York: Springer 2007

## General physics with reference to plasmonics

- [13] Morse, P. M.; Feshbach, H.: Methods of theoretical physics, Volume 1 and 2. New York: McGraw-Hill 1953
- [14] Feynman, R. P.; Leighton, R. B.; Sands, M.: The Feynman lectures on physics. Vol. II. Mainly electromagnetism and matter. Los Angeles: CALTEC 1963  
*In German:* Feynman-Vorlesungen über Physik. Band II: Elektromagnetismus und Struktur der Materie. 3. Aufl. München: Oldenburg 2001
- [15] Singh, J.: Physics of semiconductors and their heterostructures. New Yourk: McGraw-Hill 1993. Sect. 12.7 and 15.2
- [16] Myers, H. P.: Introductory solid state physics, 2. Ed. New Delhi: Viva Books 1998
- [17] Jackson, J. D.: Classical electrodynamics, 3. Ed. New York: John Wiley & Sons 1999  
*In German:* Klassische Elektrodynamik, 4. Aufl. Berlin: Walter de Gruyter 2006. Kap. 7.5
- [18] Iizuka, K.: Elements of photonics. Vol. II: For fiber and integrated optics. New York: John Wiley & Sons 2001. Sect. 14.4.3.2

## Recent publications

- [19] Fujii, M.; Freude, W.; Leuthold, J.: Numerical prediction of minimum sub-diffraction-limit image generated by silver surface plasmon lenses. Opt. Expr. 16 (2008) 21039–21052
- [20] Fujii, M.; Freude, W.; Leuthold, J.: Dispersion relation and loss of sub-wavelength confined mode of metal-dielectric-gap optical waveguides. Photon. Technol. Lett. 21 (2009) 362–364

